




FS and FD Cast Device Boxes: Two Gang; Malleable Iron, Aluminum


UNILETS® for use with Threaded Rigid Metal Conduit and IMC. FS Box 2.00" Deep, FD Box 2.69" Deep. Furnished with Internal Ground Screw.

	Type	Depth	Hub Size (Inches)	Catalog Number Malleable Iron Ridge Top Aluminum Ridge Top
	FS	Shallow	1/2	FS-2-50
			3/4	FS-2-75
			1	FS-2-100
	FD	Deep	1/2	FD-2-50
			3/4	FD-2-75
			1	FD-2-100
	FSC	Shallow	1/2	FSC-2-50
			3/4	FSC-2-75
			1	FSC-2-100
	FDC	Deep	1/2	FDC-2-50
			3/4	FDC-2-75
			1	FDC-2-100
	FSS	Shallow	1/2	FSS-2-50
			3/4	FSS-2-75
			1	FSS-2-100
	FDS	Deep	3/4	FDS-2-75
	FSD	Shallow	1/2-3/4	FSD-2-75
	FS Extension	1.00"		FS-2EXT

† Largest hub at bottom in illustration.

Extension does not have a ground screw.

All cover and device screws 6-32 thread.

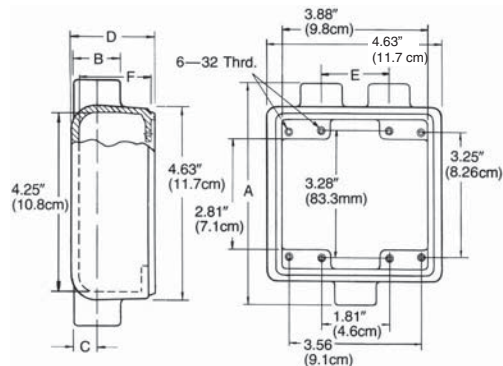

Hub Size (In.)	A	B	C	D "FS"	D "FD"	E	F "FS"	F "FD"
Malleable Iron and Aluminum Dimensions (Inches)								
1/2	5.88	1.13	.63	2.00	2.69	1.88	1.78	2.44
3/4	5.88	1.38	.75	2.00	2.69	1.88	1.78	2.44
1	6.31	1.69	.94	2.00	2.69	2.06	1.78	2.44
Malleable Iron and Aluminum Dimensions (Centimeters)								
1/2	14.9	2.9	1.6	5.1	6.8	4.8	4.5	6.2
3/4	14.9	3.5	1.9	5.1	6.8	4.8	4.5	6.2
1	16.0	4.3	2.4	5.1	6.8	5.2	4.5	6.2