

Straight Blade Devices  
 20A, 3 Phase Y 120/208V AC, 4 Pole, 4 Wire  
 Non-Grounding  
 Single Receptacle

# HUBBELL

## Features

- Industrial heavy duty receptacle
- Deep body design
- Impact resistant

## Ordering Information

Description	Device Color	UPC	Catalog Number
Receptacle, black nylon body	Black	783585014418	HBL7250

## Listings

UL Listed to UL498 File E1706  
 NEMA® WD-6 Compliant

## Specifications

Body	Nylon
Base	PBT
Contacts	Brass
Mounting Plate	Steel
Terminal Screws	Brass
Terminal Clamp	Nickel plated steel
Mounting Screws	Plated steel

## Performance

### Electrical


Current Interrupting	Certified for current interrupting at full rated current
Dielectric Voltage	Withstands 2,000V minimum

### Mechanical

Terminal Accommodation	#14-#10 AWG copper stranded or solid conductor only
Terminal Identification	Terminals identified in accordance with UL 498 and CSA

### Environmental

Flammability	UL 94 V-2
IP Suitability	IP20
Operating Temperatures	Maximum continuous 75°C; minimum -40°C (w/o impact)

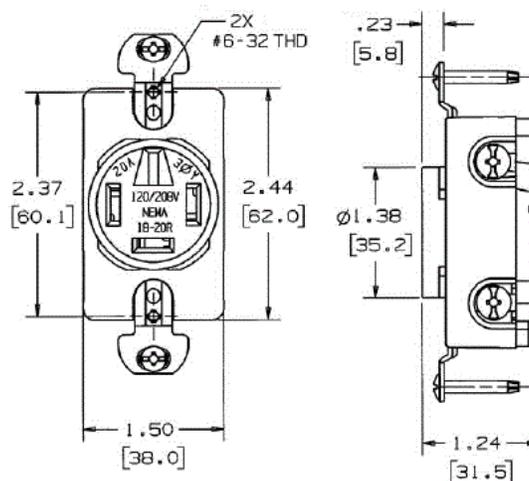

## Accessories

Wallplate or Weatherproof Cover 1.40" Opening

## Resources

Customer Use Drawing  
 eCatalog

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

