



300 UNIVERSAL BEAM CLAMP



CERTIFICATIONS



SPECIFICATIONS


Material: Cast Iron

Catalog Number	Finish	Rod Size(RS)	Flange Thickness(FT)	A	Torque(TQ)	Static Load 1(F1)	Static Load 2(F2)	Packing Quantity
3000037EG	Electrogalvanized	3/8"	3/4" Max	1 1/8"	5 ft lb	500 lb	250 lb	1.0000
3000037PL	Plain	3/8"	3/4" Max	1 1/8"	5 ft lb	500 lb	250 lb	1.0000
3000050EG	Electrogalvanized	1/2"	3/4" Max	1 1/8"	8 ft lb	950 lb	760 lb	1.0000
3000050PL	Plain	1/2"	3/4" Max	1 1/8"	8 ft lb	950 lb	760 lb	1.0000
3000062EG	Electrogalvanized	5/8"	3/4" Max	1 1/8"	5 ft lb	950 lb	760 lb	1.0000
3000062PL	Plain	5/8"	3/4" Max	1 1/8"	5 ft lb	950 lb	760 lb	1.0000
3000075EG	Electrogalvanized	3/4"	3/4" Max	1 1/8"	5 ft lb	950 lb	760 lb	1.0000
3000075PL	Plain	3/4"	3/4" Max	1 1/8"	5 ft lb	950 lb	760 lb	1.0000
3000087EG	Electrogalvanized	7/8"	3/4" Max	1 1/8"	5 ft lb	950 lb	760 lb	1.0000
3000087PL	Plain	7/8"	3/4" Max	1 1/8"	5 ft lb	950 lb	760 lb	1.0000

ADDITIONAL PRODUCT DETAILS

Setscrew must be tightened and torqued onto the sloped side of the I-beam.

DIAGRAMS

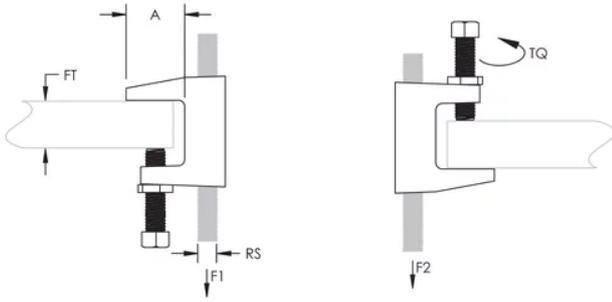

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.nvent.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

North America

+1.800.753.9221
Option 1 – Customer Care
Option 2 – Technical Support

Europe

Netherlands:
+31 800-0200135
France:
+33 800 901 793

Europe

Germany:
800 1890272
Other Countries:
+31 13 5835404

APAC

Shanghai:
+ 86 21 2412 1618/19
Sydney:
+61 2 9751 8500



Our powerful portfolio of brands:
nVent.com CADDY ERICO HOFFMAN RAYCHEM SCHROFF
TRACER