



WORLD-CLASS ELECTRICAL CONDUIT FITTINGS AND ACCESSORIES

Cable Supports
EMT Fittings
Rigid/IMC Fittings
Hazardous Location Fittings
Liquidtight Fittings
Cable Connectors

Strain Relief Cord Grips
PVC Fittings
Weatherproof Products
Service Entrance
Installation Supports
Grounding

WWW.PECO-ELECTRIC.COM

Since 1935, PECO has been an American, family-owned business, and a reliable, trusted, and “no nonsense” source of world-class electrical conduit fittings and accessories for thousands of electricians, contractors, and distributors across the United States and Canada.




Dear Valued Customer,

At Producto Electric Corporation (PECO), we have always strived to have long-term relationships with our customers, sales representatives and suppliers. Our new catalog embodies this approach by incorporating industry feedback based on the needs of our customers and targeting methodologies to overcome the global supply chain challenges to be the premier provider within the fittings industry.

Since 1935, PECO has been a name synonymous with the electrical conduit fittings and accessories business. Now, we have our 3rd and 4th generations of our family running the business and investing in our growth and revival as we approach our 90th year of continuous operations. We pride ourselves in being a US-based, family-owned and operated business.

We are rounding out our products lines and expanding our partnerships with sales representatives and distributors who share in our philosophy of being smaller and more agile in the face of corporate consolidations and acquisitions. Our goals are to remain dedicated to continuous improvement in our NY-based manufacturing processes, customer service, and support to our valued sales representatives, who are also the lifeblood of PECO.

We look forward to the coming years as we grow together in the United States, North America, and other strategic locations around the world. We thank you for your loyalty and partnership, and we will continue to invest in our collective success. 

Sincerely,

Scott Aronson
President

Please visit us on our website and follow us on LinkedIn.
Be a partner in our future success.



www.peco-electric.com



[/company/producto-electric](https://www.linkedin.com/company/producto-electric)





CONTENTS

About PECO



Terms & Conditions



Cable Support Profile



Hazardous Locations Profile



PRODUCT CATEGORIES

Cable Supports



PVC Fittings



EMT Fittings



Weatherproof Products



Rigid/IMC Fittings



Service Entrance



Hazardous Locations Fittings



Installation Supports



Liquidtight Fittings



Grounding



Cable Connectors



Miscellaneous



Strain Relief Cord Grips



Index



NEED HELP? CONTACT OUR FRIENDLY CUSTOMER SERVICE
845-359-4900 • CUSTOMERSERVICE@PECO-ELECTRIC.COM

ABOUT PECO

Founded in 1935, PECO is headquartered in Orangeburg, New York, just 20 miles north of New York City. We make Hazardous Location products for other large manufacturers in the industry—and are one of only two Underwriter Laboratory-listed manufacturers of Cable Support Bodies and Wedges.



PECO provides an extensive line of premium-quality electrical construction products to service commercial, industrial, and residential electrical distributors. Our tier-one support is coordinated across a strong nationwide network of sales representatives and distribution partners to satisfy all of our customers' purchasing requirements.

PECO's national distribution network is anchored from our New York location with current stocking warehouses strategically located throughout the continental United States and in Puerto Rico, which supports our Caribbean business.

**OUTSTANDING
QUALITY**

**EXCEPTIONAL
CUSTOMER SERVICE**

**EXTENSIVE INVENTORY
+ FAST TURNAROUND**

An American Icon for Generations of Distributors + Contractors

Throughout our history, PECO has thrived by continuously translating American ingenuity, working-class grit, and entrepreneurial agility into innovation, quality, and service. Even as our nation and industry has adapted to challenges—from wars, industrial expansions and economic booms to globalization and technological advances, PECO has been counted on to remain at the very heart of the electrical and construction industries.

An Intense Focus on our Mission

Throughout these eras, PECO has stayed focused on its mission: serving as a partner to representatives, distributors, and contractors who continue to reward us for new product ideas and designs that made their job easier, their projects more efficient and their time on task shorter and trouble-free.

Freedom Tower and WTC Plaza

We are proud to have our UL-listed Cable Support Bodies and Wedges in the new Freedom Tower and other WTC Plaza buildings. We were able to support our nation at a critical time by providing these components on an exceptionally accelerated turnaround basis.



TERMS & CONDITIONS

1. ORDER ACCEPTANCE: Purchaser agrees that all Purchase Orders and final contracts between the purchaser and PECO are subject to the terms and conditions indicated in this catalog. Any order containing different or additional terms to those set forth herein shall be deemed material alterations and are subject to specific approval by PECO.

2. MINIMUM ORDER: A minimum charge of \$200.00 will be made for each invoice. Orders for less than \$200.00 can be processed for a \$25.00 small order handling fee.

3. CASH DISCOUNT: Upon approved credit, the following terms will apply; 2% Cash Discount, 10th prox., net 30 days. To earn this discount, invoices dated 1st through 25th inclusive are payable on the 10th of the following month. Invoices dated 26th through 31st inclusive are considered for cash discount purposes only as being dated the first day of the following month and are payable as such. Invoices bear the date the order was shipped. Cash discount does not apply to transportation, special packaging, or other special preparation or handling charges.

4. FREIGHT: Full freight is allowed of \$1200.00 for shipments made to locations East of the Mississippi and \$1,500.00 for shipments made to locations West of the Mississippi. Orders that do not meet the above requirements will be shipped prepaid, and charges to be added to invoices. Special routing requests such as air freight or other special handling will be shipped freight collect, except direct to job sites which will be shipped prepaid and charged.

5. CLAIMS: All PECO shipments are made F.O.B. shipping location. Title to the goods and risk of loss passes to the Purchaser on delivery to the Common Carrier at the shipping point. Any claim for loss or damage in transit should be filed by the Purchaser with the Common Carrier involved. PECO will not be responsible for any losses after having received "in good order" receipts from the transportation company. Claims for shortages must be reported in writing to PECO in Orangeburg, N.Y. within 30 days after receipt of shipment. Claims not reported within this time period will not be allowed.

6. RETURN GOODS POLICY: PECO will accept items of its manufacture for return and material credit subject to the following conditions:

Prior formal approval with an RGA Number must be secured from the Home Office in Orangeburg. This request may be initiated by the local PECO sales representative and must contain the following information: dates, catalog number, quantities, invoice and order numbers and the reason for the return request.

- All material to be returned must be currently cataloged items, in resalable condition, in full carton quantities. No broken cartons will be accepted.
- Credit will be allowed only on quantities actually received by PECO and subject to PECO inspection.
- A minimum restocking charge of 25% will be applied to all returned materials.
- Material purchased more than 12 months-prior to the return request are not returnable.
- Return shipments must be prepaid to the warehouse designated.
- Credit will be issued in the form of material credit only. Cash refunds will not be made.

7. LIMITED WARRANTY: PECO fittings, if properly used, are guaranteed against mechanical, electrical and physical defects for a period of one year from the date of shipment from our factory. No other express warranties or guarantees are intended or implied and are expressly disclaimed. Our obligation under this guarantee shall be limited to furnishing new fittings in exchange for fittings inspected by us and found to be defective and any other direct or consequential costs are expressly excluded.

8. PRICES: Subject to change without notice and are those in effect at the time of shipment. Any written quotations for specific quantities will be protected for 30 days unless otherwise noted in the original quote.

9. TAXES: PECO reserves the right to add to the sales price any tax imposed by law on the sale of our products.

10. SPECIAL ORDERS: Orders for special items not listed in our catalog which includes items modified per customer specification or unusual quantities of a standard catalog item produced especially for an order are accepted only on a non-cancelable, nonreturnable basis.

11. GENERAL NOTES:

- Producto Electric Corporation's fittings meet the requirements of Federal specifications:
 - W-F-408C Fittings for cable, power, electrical and conduit, metal flexible.
 - W-F-408D Fittings for conduit, metal, rigid (thick wall & thin wall EMT) type.
- Underwriters Laboratories listings will be supplied upon request.
- Products are manufactured per NEMA FB-1 to be utilized according to the National Electric Code.
- NAED/DC1 No. 78-5244.
- Product weights shown our catalog are approximate and are meant for shipping information only.



HIGHEST QUALITY CABLE SUPPORTS

The level of construction in the U.S. continues to escalate at a rapid pace. In many cities, the only option is to build up!

Producto Electric Corp (PECO) features a fittings line led by our cable supports for vertical raceways and risers for high-rise buildings, making us well positioned to support the construction industry.

*Proudly used in construction
of the Freedom Tower at
One World Trade Center*



PECO has a complete UL-listed assembly for Cable Supports (Bodies & Wedges) and is one of only two manufacturers in the U.S. to meet the requirements of the NFPA 70® National Electric Code. Other manufacturers, along with their distributors, only have UL-listed bodies which presents risk and exposure to the contractors for a non-compliant installation.

“PECO has been a true partner. They have a quick turnaround for getting us the Cable Support bodies and wedges and have a quality product. It is nice to know that we can not only speak to a live person on the phone but that the product is also configured and fabricated right here in New York.”

~NYC Distributor



THE PECO ADVANTAGE

We complete all wire configurations & customizations in our New York manufacturing location.

Our production team's special skill set can turn around high-quality products more rapidly than our only industry competitor.


SPECS ON BACK



CONTACT OUR FRIENDLY CUSTOMER SERVICE 845-359-4900 • CUSTOMERSERVICE@PECO-ELECTRIC.COM

HAZARDOUS LOCATION FITTINGS – FLEXIBLE COUPLINGS (FCs)

The PECO Flexible Couplings (FCs) are made right here in the US and cut/configured at our factory in Orangeburg, NY. They are all made from bronze braided tubing, have an arc resistant liner and come with two female threaded-end fittings and two male nipples.

The FCs are  listed for sizes ½" to 2" and lengths up to 36" for each size (equal to ECGJH). Custom lengths are available, yet third party certifications are not available for lengths >36".

APPLICATIONS

Explosion Proof and Dust Ignition Proof FCs are designed for use in areas where machine vibration or movement is a problem. They can also be used in place of rigid conduit in difficult bend situations. They are corrosion resistant and watertight.

USES

- Chemical Plants
- Food and Beverage Plants
- Energy and Power Utilities Facilities
- Oil, Gas, Petroleum Refineries
- Pulp and Paper Facilities
- Wastewater Plants



DID YOU KNOW?

Materials used for the FCs were also used in the US space program. Tried, tested and proven!

PECO's FCs are regarded as among the highest quality in the industry. Under agreement, we make them for two of the leading manufacturers in the electrical industry.

See our Hazardous Location Section of this catalog or visit www.PECO-electric.com for more hazardous location products.

CABLE SUPPORTS

CABLE SUPPORT
WEDGES

CABLE SUPPORT
BODIES

CABLE SUPPORT
RETROFIT BODIES



CS150-B


HIGHEST QUALITY CABLE SUPPORTS

FEATURES

- Supports cables in vertical raceways or risers per the NFPA 70® National Electric Code
- Meets UL-listing requirements for both body & wedge assembly in High Rise Buildings (> than 75ft in height)
- Custom-cut insulating wedges for your specific application (customized at PECO's U.S. factory)
- Designed for indoor use with non-armored electrical cable at voltages up to and including 600V – for vertical conduit raceways and risers
- Required whenever the vertical rise of conductors in a raceway exceeds the values listed on back (Support Requirements for Conductors)

APPLICATIONS

- For use with non-armored electrical cables in vertical conduit raceways and risers

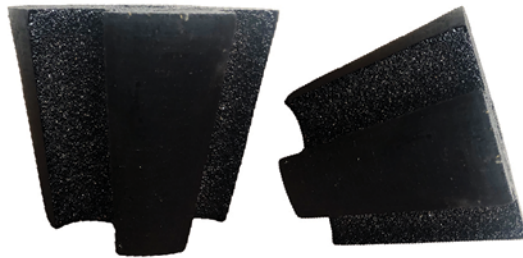

CABLE SUPPORT WEDGES

Wood with Black Lacquer Finish

Cat. No.	Trade Size	Std. Pkg.	St. Weight	Large End Dia	Height
Cut for between 1 and 3 Conductors					
CS-15OPT1	1-1/2"	1	0.1	1.75	1.75
CS-20OPT1	2"	1	0.3	2.13	2.13
CS-25OPT1	2-1/2"	1	0.4	2.83	2.38
CS-30OPT1	3"	1	0.4	3.13	2.75
CS-35OPT1	3-1/2"	1	0.6	3.63	3.13
CS-40OPT1	4"	1	0.7	3.88	3.38
Cut for between 4 and 6 Conductors					
CS-15OPT2	1-1/2"	1	0.1	1.75	1.75
CS-20OPT2	2"	1	0.3	2.13	2.13
CS-25OPT2	2-1/2"	1	0.4	2.83	2.38
CS-30OPT2	3"	1	0.4	3.13	2.75
CS-35OPT2	3-1/2"	1	0.6	3.63	3.13
CS-40OPT2	4"	1	0.7	3.88	3.38

Support Requirements for Conductors

AWG or Circular-Mill Size of Wire	Support of Conductors in Vertical Raceways	Aluminum or Copper-Clad Aluminum	Copper
1 AWG through 1/0 AWG	Not greater than	200 feet	100 feet
2/0 AWG through 4/0 AWG	Not greater than	180 feet	80 feet
Over 4/0 AWG through 350 kcmil	Not greater than	135 feet	60 feet
Over 350 kcmil through 500 kcmil	Not greater than	120 feet	50 feet
Over 500 kcmil through 750 kcmil	Not greater than	95 feet	40 feet
Over 750 kcmil	Not greater than	85 feet	35 feet

N.E.C. Table 300-19 (a). Spacing for Conductors Supports.
NOTE: Orders are Non-Cancellable and Non-Returnable.



CABLE SUPPORT BODIES

Malleable Iron - Zinc Plated with Phenolic Liner

Cat. No.	Trade Size	Unit Pkg.	Std. Pkg.	Dia	Height
CS-150B	1-1/2"	-	5	2.61	2.16
CS-200B	2"	2	10	3.13	2.25
CS-250B	2-1/2"	2	10	3.63	2.60
CS-300B	3"	2	10	4.25	2.75
CS-350B	3-1/2"	1	5	5.00	3.13
CS-400B	4"	1	5	5.50	3.38



CABLE SUPPORT RETROFIT BODIES

Two Bakelite Body Sections with Stainless Steel Retaining Straps

Cat. No.	Trade Size	Unit Pkg.	Std. Pkg.	Dia	Height
CSR-200B	2"	3	15	4.77	2.30
CSR-250B	2-1/2"	1	10	5.32	2.70
CSR-300B	3"	1	10	5.96	2.85
CSR-350B	3-1/2"	1	5	6.63	3.33
CSR-400B	4"	1	5	7.26	3.58

EMT FITTINGS

SET SCREW CONNECTORS
& COUPLINGS

COMPRESSION CONNECTORS
& COUPLINGS

COMBINATION COUPLINGS

SET SCREW CONDUIT BODIES

CONDUIT BODY COVERS & GASKETS

STRAPS

ELBOWS



300ST

STEEL EMT SET SCREW CONNECTORS

Connects EMT conduit to a box or enclosure

Features: Concrete-tight when taped
Material: Steel
Certifications: cULus



STANDARD				INSULATED THROAT			
Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
300ST	1/2"	50	500	300BST	1/2"	50	500
301ST	3/4"	25	250	301BST	3/4"	25	250
302ST	1"	50	200	302BST	1"	50	200
303ST	1 1/4"	25	100	303BST	1 1/4"	25	100
304ST	1 1/2"	10	40	304BST	1 1/2"	10	40
305ST	2"	5	20	305BST	2"	5	20
306ST	2 1/2"	-	12	306BST	2 1/2"	-	12
307ST	3"	-	12	307BST	3"	-	12
308ST	3 1/2"	-	6	308BST	3 1/2"	-	6
309ST	4"	-	6	309BST	4"	-	6

STEEL EMT SET SCREW COUPLINGS

Connects two lengths of EMT conduit

Features: Concrete-tight when taped
Material: Steel
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
310ST	1/2"	50	500	315ST	2"	5	20
311ST	3/4"	25	250	316ST	2 1/2"	-	12
312ST	1"	50	200	317ST	3"	-	12
313ST	1 1/4"	25	100	318ST	3 1/2"	-	6
314ST	1 1/2"	10	40	319ST	4"	-	6

STEEL EMT COMPRESSION CONNECTORS

Connects EMT conduit to a box or enclosure

Features: Concrete-tight
Material: Steel
Certifications: cULus



STANDARD				INSULATED THROAT			
Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
260ST	1/2"	50	500	260BST	1/2"	50	500
261ST	3/4"	25	250	261BST	3/4"	25	250
262ST	1"	50	200	262BST	1"	50	200
263ST	1 1/4"	25	100	263BST	1 1/4"	25	100
264ST	1 1/2"	10	40	264BST	1 1/2"	10	40
265ST	2"	5	20	265BST	2"	5	20
266ST	2 1/2"	-	12	266BST	2 1/2"	-	12
267ST	3"	-	12	267BST	3"	-	12
268ST	3 1/2"	-	6	268BST	3 1/2"	-	6
269ST	4"	-	6	269BST	4"	-	6

STEEL EMT COMPRESSION COUPLINGS

Connects two lengths of EMT conduit

Features: Concrete-tight
Material: Steel
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
320ST	1/2"	50	500	325ST	2"	5	20
321ST	3/4"	25	250	326ST	2 1/2"	-	12
322ST	1"	50	200	327ST	3"	-	12
323ST	1 1/4"	25	100	328ST	3 1/2"	-	6
324ST	1 1/2"	10	40	329ST	4"	-	6

STEEL EMT RAINLIGHT COMPRESSION CONNECTORS

Connects EMT conduit to a box or enclosure for a raintight fit

Features: Suitable for wet locations, Concrete-tight
Material: Steel
Certifications: cULus



STANDARD				INSULATED THROAT			
Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
260RST	1/2"	50	500	260RBST	1/2"	50	500
261RST	3/4"	25	250	261RBST	3/4"	25	250
262RST	1"	50	200	262RBST	1"	50	200
263RST	1 1/4"	25	100	263RBST	1 1/4"	25	100
264RST	1 1/2"	10	40	264RBST	1 1/2"	10	40
265RST	2"	5	20	265RBST	2"	5	20
266RST	2 1/2"	-	12	266RBST	2 1/2"	-	12
267RST	3"	-	12	267RBST	3"	-	12
268RST	3 1/2"	-	6	268RBST	3 1/2"	-	6
269RST	4"	-	6	269RBST	4"	-	6

STEEL EMT RAINLIGHT COMPRESSION COUPLINGS

Connects two lengths of EMT conduit for a raintight fit

Features: Suitable for wet locations, Concrete-tight
Material: Steel
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
320RST	1/2"	50	500	325RST	2"	5	20
321RST	3/4"	25	250	326RST	2 1/2"	-	12
322RST	1"	50	200	327RST	3"	-	12
323RST	1 1/4"	25	100	328RST	3 1/2"	-	6
324RST	1 1/2"	10	40	329RST	4"	-	6

ZINC EMT SET SCREW CONNECTORS

Connects EMT conduit to a box or enclosure

Features: Concrete-tight when taped
Material: Zinc
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
300	1/2"	50	500	305	2"	5	20
301	3/4"	25	250	306	2 1/2"	-	12
302	1"	50	200	307	3"	-	12
303	1 1/4"	25	100	308	3 1/2"	-	6
304	1 1/2"	10	40	309	4"	-	6

ZINC EMT SET SCREW COUPLINGS

Connects two lengths of EMT conduit

Features: Concrete-tight when taped
Material: Zinc
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
310	1/2"	50	500	315	2"	5	20
311	3/4"	25	250	316	2 1/2"	-	12
312	1"	50	200	317	3"	-	12
313	1 1/4"	25	100	318	3 1/2"	-	6
314	1 1/2"	10	40	319	4"	-	6

ZINC EMT COMPRESSION CONNECTORS

Connects EMT conduit to a box or enclosure

Features: Concrete-tight
Material: Zinc
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
260	1/2"	50	500	265	2"	5	20
261	3/4"	25	250	266	2 1/2"	-	12
262	1"	50	200	267	3"	-	12
263	1 1/4"	25	100	268	3 1/2"	-	6
264	1 1/2"	10	40	269	4"	-	6

ZINC EMT COMPRESSION COUPLINGS

Connects two lengths of EMT conduit

Features: Concrete-tight
Material: Zinc
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
320	1/2"	50	500	325	2"	5	20
321	3/4"	25	250	326	2 1/2"	-	12
322	1"	50	200	327	3"	-	12
323	1 1/4"	25	100	328	3 1/2"	-	6
324	1 1/2"	10	40	329	4"	-	6

ZINC 90° SET SCREW CONNECTORS

Use to connect EMT conduit to a steel box or enclosure where a close radius is desired

Features: Concrete-tight when taped
Material: Zinc
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
300-90	1/2"	25	250
301-90	3/4"	20	200

ZINC 90° COMPRESSION CONNECTORS

Use to connect EMT conduit to a steel box or enclosure where a close radius is desired

Features: Concrete-tight when taped
Material: Zinc
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
260-90	1/2"	25	250
261-90	3/4"	20	200

EMT OFFSET CONNECTORS EMT TO BOX

Connects EMT conduit to box or enclosure

Features: Concrete-tight when taped
Material: Zinc
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
300-OC	1/2"	10	100
301-OC	3/4"	10	100
302-OC	1"	10	100

COMBINATION COUPLINGS EMT TO FLEXIBLE CONDUIT

Connects EMT conduit to flexible metal conduit

Features: Set-screw to clamp type
Material: Zinc
Certifications: cULus



*Product Approved for EMT to NM cable

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
*685	1/2" EMT to 3/8" Flex	10	100
686	1/2" EMT to 1/2" Flex	10	100
687	3/4" EMT to 3/4" Flex	10	100

COMBINATION COUPLINGS LIQUIDTIGHT TO EMT CONDUIT

Connects Liquidtight conduit to EMT conduit

Features: Liquidtight, Raintight, Oiltight

Material: Steel

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
RT-260	1/2"	25	250
RT-261	3/4"	20	200

EMT INSIDE CORNER PULL ELBOWS

Connects 2 lengths of EMT conduit for a 90° inside corner bend

Features: Concrete-tight connection when taped

Material: Zinc

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
680EMT	1/2"	10	100
681EMT	3/4"	5	50

EMT TO BOX 90° PULL ELBOW

Use to connect EMT conduit to a steel box or enclosure to form a 90° bend

Features: Removable cover facilitates wire pulling

Material: Zinc

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
650EMT	1/2"	10	100
651EMT	3/4"	5	50

EMT TO EMT 90° PULL ELBOW

Use to connect EMT conduit together on a 90° bend

Features: Removable cover facilitates wire pulling

Material: Zinc

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
670EMT	1/2"	10	100
671EMT	3/4"	5	50
672EMT	1"	-	25

EMT CONDUIT BODIES TYPE C - ALUMINUM

Allows access to the interior of a conduit system for inspection, pulling, and maintenance

Features: Threadless body with set screws for EMT conduit

Material: Aluminum

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
C-50AE	1/2"	10	50	C-200AE	2"	-	5
C-75AE	3/4"	10	50	C-250AE	2 1/2"	-	1
C-100AE	1"	5	25	C-300AE	3"	-	1
C-125AE	1 1/4"	-	10	C-350AE	3 1/2"	-	1
C-150AE	1 1/2"	-	10	C-400AE	4"	-	1

EMT CONDUIT BODIES TYPE LB - ALUMINUM

Allows access to the interior of a conduit system for inspection, pulling, and maintenance

Features: Threadless body with set screws for EMT conduit

Material: Aluminum

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
LB-50AE	1/2"	10	50	LB-200AE	2"	-	5
LB-75AE	3/4"	10	50	LB-250AE	2 1/2"	-	1
LB-100AE	1"	5	25	LB-300AE	3"	-	1
LB-125AE	1 1/4"	-	10	LB-350AE	3 1/2"	-	1
LB-150AE	1 1/2"	-	10	LB-400AE	4"	-	1

EMT CONDUIT BODIES TYPE LL - ALUMINUM

Allows access to the interior of a conduit system for inspection, pulling, and maintenance

Features: Threadless body with set screws for EMT conduit

Material: Aluminum

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
LL-50AE	1/2"	10	50	LL-200AE	2"	-	5
LL-75AE	3/4"	10	50	LL-250AE	2 1/2"	-	1
LL-100AE	1"	5	25	LL-300AE	3"	-	1
LL-125AE	1 1/4"	-	10	LL-350AE	3 1/2"	-	1
LL-150AE	1 1/2"	-	10	LL-400AE	4"	-	1

EMT CONDUIT BODIES TYPE LR - ALUMINUM

Allows access to the interior of a conduit system for inspection, pulling, and maintenance

Features: Threadless body with set screws for EMT conduit

Material: Aluminum

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
LR-50AE	1/2"	10	50	LR-200AE	2"	-	5
LR-75AE	3/4"	10	50	LR-250AE	2 1/2"	-	1
LR-100AE	1"	5	25	LR-300AE	3"	-	1
LR-125AE	1 1/4"	-	10	LR-350AE	3 1/2"	-	1
LR-150AE	1 1/2"	-	10	LR-400AE	4"	-	1

EMT CONDUIT BODIES TYPE T - ALUMINUM

Allows access to the interior of a conduit system for inspection, pulling, and maintenance

Features: Threadless body with set screws for EMT conduit

Material: Aluminum

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
T-50AE	1/2"	10	50	T-200AE	2"	-	5
T-75AE	3/4"	10	50	T-250AE	2 1/2"	-	1
T-100AE	1"	5	25	T-300AE	3"	-	1
T-125AE	1 1/4"	-	10	T-350AE	3 1/2"	-	1
T-150AE	1 1/2"	-	10	T-400AE	4"	-	1

COMBINATION CONDUIT BODIES W/COVER & GASKET TYPE C - ALUMINUM

Allows access for inspection, pulling, and maintenance

Features: Threaded body for Rigid/IMC conduit and set screws for EMT conduit

Material: Aluminum

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
C-50CA	1/2"	10	50
C-75CA	3/4"	10	50
C-100CA	1"	5	25
C-125CA	1 1/4"	-	10
C-150CA	1 1/2"	-	10
C-200CA	2"	-	5

COMBINATION CONDUIT BODIES W/COVER & GASKET TYPE LB - ALUMINUM

Allows access for inspection, pulling, and maintenance

Features: Threaded body for Rigid/IMC conduit and set screws for EMT conduit

Material: Aluminum

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
LB-50CA	1/2"	10	50
LB-75CA	3/4"	10	50
LB-100CA	1"	5	25
LB-125CA	1 1/4"	-	10
LB-150CA	1 1/2"	-	10
LB-200CA	2"	-	5

COMBINATION CONDUIT BODIES W/COVER & GASKET TYPE LL - ALUMINUM

Allows access for inspection, pulling, and maintenance

Features: Threaded body for Rigid/IMC conduit and set screws for EMT conduit

Material: Aluminum

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
LL-50CA	1/2"	10	50
LL-75CA	3/4"	10	50
LL-100CA	1"	5	25
LL-125CA	1 1/4"	-	10
LL-150CA	1 1/2"	-	10
LL-200CA	2"	-	5

COMBINATION CONDUIT BODIES W/COVER & GASKET TYPE LR - ALUMINUM

Allows access for inspection, pulling, and maintenance

Features: Threaded body for Rigid/IMC conduit and set screws for EMT conduit

Material: Aluminum

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
LR-50CA	1/2"	10	50
LR-75CA	3/4"	10	50
LR-100CA	1"	5	25
LR-125CA	1 1/4"	-	10
LR-150CA	1 1/2"	-	10
LR-200CA	2"	-	5

COMBINATION CONDUIT BODIES W/COVER & GASKET TYPE T - ALUMINUM

Allows access for inspection, pulling, and maintenance

Features: Threaded body for Rigid/IMC conduit and set screws for EMT conduit

Material: Aluminum

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
T-50CA	1/2"	10	50
T-75CA	3/4"	10	50
T-100CA	1"	5	25
T-125CA	1 1/4"	-	10
T-150CA	1 1/2"	-	10
T-200CA	2"	-	5

**CONDUIT BODY COVERS
STEEL**

Encloses conduit body

Features: Supplied with screws
Material: Steel
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
SC-50	1/2"	25	250
SC-75	3/4"	25	250
SC-100	1"	20	250
SC-125	1 1/4" to 1 1/2"	25	100
SC-200	2"	-	50
SC-250	2 1/2" to 3"	-	10
SC-350	3 1/2" to 4"	-	10

**CONDUIT BODY COVERS
ALUMINUM**

Encloses conduit body

Features: Supplied with screws
Material: Aluminum
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
AC-50	1/2"	25	250
AC-75	3/4"	25	250
AC-100	1"	20	250
AC-125	1 1/4" to 1 1/2"	25	100
AC-200	2"	-	50
AC-250	2 1/2" to 3"	-	10
AC-350	3 1/2" to 4"	-	10

**CONDUIT BODY GASKETS
NEOPRENE**

Provides dust and raintight seal between conduit body and cover

Features: Fits all form 5 body types
Material: Neoprene
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
VG-50	1/2"	25	250
VG-75	3/4"	25	250
VG-100	1"	20	250
VG-125	1 1/4" to 1 1/2"	25	100
VG-200	2"	-	50
VG-250	2 1/2" to 3"	-	10
VG-350	3 1/2" to 4"	-	10

CONDUIT BODY WIRE FILL CHART

Die Cast Aluminum Conduit Bodies

Maximum Number of Conductors

Trade Size	LB	C	LL	LR	T
1/2"	N/A	N/A	N/A	N/A	N/A
3/4"	6 AWG	6 AWG	6 AWG	6 AWG	6 AWG
1"	3 - 4 AWG	3 - 4 AWG	3 - 4 AWG	3 - 4 AWG	3 - 4 AWG
1 1/4"	3 - 2 AWG	3 - 2 AWG	3 - 2 AWG	3 - 2 AWG	3 - 2 AWG
1 1/2"	3 - 1/0 AWG	3 - 1/0 AWG	3 - 1/0 AWG	3 - 1/0 AWG	3 - 2 AWG
2"	3 - 4/0 AWG	3 - 2/0 AWG	3 - 4/0 AWG	3 - 4/0 AWG	3 - 4/0 AWG
2 1/2"	300 MCM	3 - 250 MCM	3 - 250 MCM	3 - 250 MCM	3 - 2/0 AWG
3"	350 MCM	3 - 250 MCM	3 - 250 MCM	3 - 250 MCM	3 - 250 MCM
3 1/2"	3 - 400 MCM	3 - 250 MCM	3 - 250 MCM	3 - 250 MCM	3 - 250 MCM
4"	3 - 400 MCM	3 - 250 MCM	3 - 250 MCM	3 - 250 MCM	3 - 250 MCM

Volume in Cu. In.

Trade Size	LB	C	LL	LR	T
1/2"	4.25	4.25	4.25	4.25	4.25
3/4"	7.2	7.2	7.2	7.2	7.2
1"	10.8	10.8	10.8	10.8	10.8
1 1/4"	30.5	30.5	30.5	30.5	30.5
1 1/2"	30.5	30.5	30.5	30.5	30.5
2"	70.7	70.7	70.7	70.7	70.7
2 1/2"	152.5	157.4	157.4	157.4	157.4
3"	152.5	179.8	179.8	179.8	179.8
3 1/2"	311.8	323.0	323.0	323.0	323.0
4"	311.8	323.0	323.0	323.0	323.0

Malleable Iron Conduit Bodies

Maximum Number of Conductors

Trade Size	LB	C	LL	LR	T
1/2"	N/A	N/A	N/A	N/A	N/A
3/4"	3 - 6 AWG	3 - 6 AWG	3 - 6 AWG	3 - 6 AWG	3 - 6 AWG
1"	3 - 4 AWG	3 - 4 AWG	3 - 4 AWG	3 - 4 AWG	3 - 4 AWG
1 1/4"	3 - 2 AWG	3 - 2 AWG	3 - 2 AWG	3 - 2 AWG	3 - 2 AWG
1 1/2"	3 - 1/0 AWG	3 - 1/0 AWG	3 - 1/0 AWG	3 - 1/0 AWG	3 - 1 AWG
2"	3 - 3/0 AWG	3 - 4/0 AWG	3 - 4/0 AWG	3 - 4/0 AWG	3 - 2/0 AWG
2 1/2"	3 - 250 MCM	3 - 300 MCM	3 - 300 MCM	3 - 300 MCM	3 - 4/0 AWG
3"	3 - 250 MCM	3 - 350 MCM	3 - 350 MCM	3 - 350 MCM	3 - 4/0 AWG
3 1/2"	3 - 350 MCM	3 - 350 MCM	3 - 350 MCM	3 - 500 MCM	3 - 350 MCM
4"	3 - 350 MCM	3 - 350 MCM	3 - 350 MCM	3 - 500 MCM	3 - 350 MCM

Volume in Cu. In.

Trade Size	LB	C	LL	LR	T
1/2"	4.5	4.5	4.5	4.5	6.0
3/4"	7.5	7.5	7.5	7.5	9.5
1"	12.5	12.5	12.5	12.5	15.0
1 1/4"	32.3	32.3	32.3	32.3	33.0
1 1/2"	35.3	35.3	35.3	35.3	36.0
2"	73.0	73.0	73.0	73.0	75.0
2 1/2"	138.0	138.0	138.0	138.0	138.0
3"	170.0	170.0	170.0	170.0	170.0
3 1/2"	300.0	300.0	300.0	300.0	300.0
4"	328.0	328.0	328.0	328.0	328.0

EMT 90° CONDUIT ELBOWS

Provides a directional change in an EMT conduit run



Features: Low conductivity, high corrosion resistance

Material: Steel

Certifications: cULus



Catalog Number	Trade Size	Radius Min	Length of Straight Min.	Offset Min.	Standard Pkg.
ELB-9050	1/2"	4"	1 1/2"	5 1/2"	50
ELB-9075	3/4"	4 1/2"	1 1/2"	6"	50
ELB-90100	1"	5 3/4"	1 7/8"	7 5/8"	25
ELB-90125	1 1/4"	7 1/4"	2"	9 1/4"	20
ELB-90150	1 1/2"	8 1/4"	2"	10 1/4"	15
ELB-90200	2"	9 1/2"	2"	11 1/2"	10
ELB-90250	2 1/2"	10 1/2"	3"	13 1/2"	1
ELB-90300	3"	13"	3 1/8"	16 1/8"	1
ELB-90400	4"	16"	3 3/8"	19 3/8"	1

EMT 45° CONDUIT ELBOWS

Provides a directional change in an EMT conduit run



Features: Low conductivity, high corrosion resistance

Material: Steel

Certifications: cULus



Catalog Number	Trade Size	Radius Min	Length of Straight Min.	Offset Min.	Standard Pkg.
ELB-4550	1/2"	4"	1 1/2"	5 3/8"	50
ELB-4575	3/4"	4 1/2"	1 1/2"	5 3/4"	50
ELB-45100	1"	5 3/4"	1 7/8"	7 1/4"	25
ELB-45125	1 1/4"	7 1/4"	2"	8 1/2"	20
ELB-45150	1 1/2"	8 1/4"	2"	9 1/4"	15
ELB-45200	2"	9 1/2"	2"	10 1/8"	10
ELB-45250	2 1/2"	10 1/2"	3"	12 1/2"	1
ELB-45300	3"	13"	3 1/8"	14 1/2"	1
ELB-45400	4"	16"	3 3/8"	17 1/8"	1

EMT STRAPS- ONE HOLE

Supports EMT conduit to mounting surface



Features: Reinforced snap-on feature

Material: Steel

Certifications: cULus

* Dual rated for EMT and Rigid



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
180-S	1/2"	100	1,000	185-S	2"	-	50
181-S	3/4"	100	1,000	*168-S	2 1/2"	-	25
182-S	1"	50	500	*169-S	3"	-	25
183-S	1 1/4"	50	500	*170-S	3 1/2"	-	10
184-S	1 1/2"	50	250	*171-S	4"	-	10

EMT STRAPS- TWO HOLE

Supports EMT conduit to mounting surface



Features: Reinforced snap-on feature

Material: Steel

Certifications: cULus

* Dual rated for EMT and Rigid



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
TH-180S	1/2"	100	1,000	TH-185S	2"	-	50
TH-181S	3/4"	100	1,000	*TH-168S	2 1/2"	-	25
TH-182S	1"	50	500	*TH-169S	3"	-	25
TH-183S	1 1/4"	50	500	*TH-170S	3 1/2"	-	10
TH-184S	1 1/2"	50	250	*TH-171S	4"	-	10

DISCOVER THE PECO DIFFERENCE



EXTENSIVE INVENTORY + FAST TURNAROUND

RIGID/IMC FITTINGS

THREADED CONDUIT BODIES
CONDUIT BODY COVERS & GASKETS
SET SCREW CONNECTORS
& COUPLINGS
COMPRESSION CONNECTORS
& COUPLINGS
WATERTIGHT HUBS
THREE-PIECE COUPLINGS
SLIP-ON COUPLINGS
COMBINATION COUPLINGS
ELBOWS & COUPLINGS
BUSHINGS & STRAPS
CLAMP BACKS
REDUCERS, LOCKNUTS & ELBOWS
NIPPLES & OFFSET NIPPLES
PLUGS
FLOOR FLANGE
MALE ENLARGER



T-50M

THREADED CONDUIT BODIES TYPE C - ALUMINUM

Allows access to the interior of a conduit system for inspection, pulling, and maintenance



Features: Threaded body and Caps Rigid/IMC conduit

Material: Aluminum

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
C-50A	1/2"	10	50	C-200A	2"	-	5
C-75A	3/4"	10	50	C-250A	2 1/2"	-	1
C-100A	1"	5	25	C-300A	3"	-	1
C-125A	1 1/4"	-	10	C-350A	3 1/2"	-	1
C-150A	1 1/2"	-	10	C-400A	4"	-	1

THREADED CONDUIT BODIES TYPE LB - ALUMINUM

Allows access to the interior of a conduit system for inspection, pulling, and maintenance



Features: Threaded body and Caps Rigid/IMC conduit

Material: Aluminum

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
LB-50A	1/2"	10	50	LB-200A	2"	-	5
LB-75A	3/4"	10	50	LB-250A	2 1/2"	-	1
LB-100A	1"	5	25	LB-300A	3"	-	1
LB-125A	1 1/4"	-	10	LB-350A	3 1/2"	-	1
LB-150A	1 1/2"	-	10	LB-400A	4"	-	1

THREADED CONDUIT BODIES TYPE LL - ALUMINUM

Allows access to the interior of a conduit system for inspection, pulling, and maintenance



Features: Threaded body and Caps Rigid/IMC conduit

Material: Aluminum

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
LL-50A	1/2"	10	50	LL-200A	2"	-	5
LL-75A	3/4"	10	50	LL-250A	2 1/2"	-	1
LL-100A	1"	5	25	LL-300A	3"	-	1
LL-125A	1 1/4"	-	10	LL-350A	3 1/2"	-	1
LL-150A	1 1/2"	-	10	LL-400A	4"	-	1

THREADED CONDUIT BODIES TYPE LR - ALUMINUM

Allows access to the interior of a conduit system for inspection, pulling, and maintenance



Features: Threaded body and Caps Rigid/IMC conduit

Material: Aluminum

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
LR-50A	1/2"	10	50	LR-200A	2"	-	5
LR-75A	3/4"	10	50	LR-250A	2 1/2"	-	1
LR-100A	1"	5	25	LR-300A	3"	-	1
LR-125A	1 1/4"	-	10	LR-350A	3 1/2"	-	1
LR-150A	1 1/2"	-	10	LR-400A	4"	-	1

THREADED CONDUIT BODIES TYPE T - ALUMINUM

Allows access to the interior of a conduit system for inspection, pulling, and maintenance



Features: Threaded body and Caps Rigid/IMC conduit

Material: Aluminum

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
T-50A	1/2"	10	50	T-200A	2"	-	5
T-75A	3/4"	10	50	T-250A	2 1/2"	-	1
T-100A	1"	5	25	T-300A	3"	-	1
T-125A	1 1/4"	-	10	T-350A	3 1/2"	-	1
T-150A	1 1/2"	-	10	T-400A	4"	-	1

THREADED CONDUIT BODIES W/COVER & GASKET - TYPE C ALUMINUM

Allows access to the interior of a conduit system for inspection, pulling, and maintenance



Features: Threaded body and Caps Rigid/IMC conduit

Material: Aluminum

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
CC-50A	1/2"	10	50	CC-200A	2"	-	5
CC-75A	3/4"	10	50	CC-250A	2 1/2"	-	1
CC-100A	1"	5	25	CC-300A	3"	-	1
CC-125A	1 1/4"	-	10	CC-350A	3 1/2"	-	1
CC-150A	1 1/2"	-	10	CC-400A	4"	-	1

THREADED CONDUIT BODIES W/COVER & GASKET TYPE LB - ALUMINUM

Allows access to the interior of a conduit system for inspection, pulling, and maintenance



Features: Threaded body and Caps Rigid/IMC conduit

Material: Aluminum
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
LBC-50A	1/2"	10	50	LBC-200A	2"	-	5
LBC-75A	3/4"	10	50	LBC-250A	2 1/2"	-	1
LBC-100A	1"	5	25	LBC-300A	3"	-	1
LBC-125A	1 1/4"	-	10	LBC-350A	3 1/2"	-	1
LBC-150A	1 1/2"	-	10	LBC-400A	4"	-	1

THREADED CONDUIT BODIES W/COVER & GASKET TYPE LL - ALUMINUM

Allows access to the interior of a conduit system for inspection, pulling, and maintenance



Features: Threaded body and Caps Rigid/IMC conduit

Material: Aluminum
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
LLC-50A	1/2"	10	50	LLC-200A	2"	-	5
LLC-75A	3/4"	10	50	LLC-250A	2 1/2"	-	1
LLC-100A	1"	5	25	LLC-300A	3"	-	1
LLC-125A	1 1/4"	-	10	LLC-350A	3 1/2"	-	1
LLC-150A	1 1/2"	-	10	LLC-400A	4"	-	1

THREADED CONDUIT BODIES W/COVER & GASKET - TYPE LR ALUMINUM

Allows access to the interior of a conduit system for inspection, pulling, and maintenance



Features: Threaded body and Caps Rigid/IMC conduit

Material: Aluminum
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
LRC-50A	1/2"	10	50	LRC-200A	2"	-	5
LRC-75A	3/4"	10	50	LRC-250A	2 1/2"	-	1
LRC-100A	1"	5	25	LRC-300A	3"	-	1
LRC-125A	1 1/4"	-	10	LRC-350A	3 1/2"	-	1
LRC-150A	1 1/2"	-	10	LRC-400A	4"	-	1

THREADED CONDUIT BODIES W/COVER & GASKET TYPE T - ALUMINUM

Allows access to the interior of a conduit system for inspection, pulling, and maintenance



Features: Threaded body and Caps Rigid/IMC conduit

Material: Aluminum
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
TC-50A	1/2"	10	50	TC-200A	2"	-	5
TC-75A	3/4"	10	50	TC-250A	2 1/2"	-	1
TC-100A	1"	5	25	TC-300A	3"	-	1
TC-125A	1 1/4"	-	10	TC-350A	3 1/2"	-	1
TC-150A	1 1/2"	-	10	TC-400A	4"	-	1

COMBINATION CONDUIT BODIES W/COVER & GASKET TYPE C - ALUMINUM

Allows access for inspection, pulling, and maintenance



Features: Threaded body for Rigid/IMC conduit and set screws for EMT conduit

Material: Aluminum
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
C-50CA	1/2"	10	50
C-75CA	3/4"	10	50
C-100CA	1"	5	25
C-125CA	1 1/4"	-	10
C-150CA	1 1/2"	-	10
C-200CA	2"	-	5

COMBINATION CONDUIT BODIES W/COVER & GASKET TYPE LB - ALUMINUM

Allows access for inspection, pulling, and maintenance



Features: Threaded body for Rigid/IMC conduit and set screws for EMT conduit

Material: Aluminum
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
LB-50CA	1/2"	10	50
LB-75CA	3/4"	10	50
LB-100CA	1"	5	25
LB-125CA	1 1/4"	-	10
LB-150CA	1 1/2"	-	10
LB-200CA	2"	-	5

COMBINATION CONDUIT BODIES W/COVER & GASKET - TYPE LL ALUMINUM

Allows access for inspection, pulling, and maintenance

Features: Threaded body for Rigid/IMC conduit and set screws for EMT conduit

Material: Aluminum

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
LL-50CA	1/2"	10	50
LL-75CA	3/4"	10	50
LL-100CA	1"	5	25
LL-125CA	1 1/4"	-	10
LL-150CA	1 1/2"	-	10
LL-200CA	2"	-	5

COMBINATION CONDUIT BODIES W/COVER & GASKET - TYPE LR ALUMINUM

Allows access for inspection, pulling, and maintenance

Features: Threaded body for Rigid/IMC conduit and set screws for EMT conduit

Material: Aluminum

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
LR-50CA	1/2"	10	50
LR-75CA	3/4"	10	50
LR-100CA	1"	5	25
LR-125CA	1 1/4"	-	10
LR-150CA	1 1/2"	-	10
LR-200CA	2"	-	5

COMBINATION CONDUIT BODIES W/COVER & GASKET - TYPE T ALUMINUM

Allows access for inspection, pulling, and maintenance

Features: Threaded body for Rigid/IMC conduit and set screws for EMT conduit

Material: Aluminum

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
T-50CA	1/2"	10	50
T-75CA	3/4"	10	50
T-100CA	1"	5	25
T-125CA	1 1/4"	-	10
T-150CA	1 1/2"	-	10
T-200CA	2"	-	5

THREADED CONDUIT BODIES TYPE C - MALLEABLE IRON

Allows access to the interior of a conduit system for inspection, pulling, and maintenance

Features: Threaded body for Rigid/IMC conduit

Material: Malleable Iron

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
C-50M	1/2"	10	50	C-200M	2"	-	5
C-75M	3/4"	10	50	C-250M	2 1/2"	-	1
C-100M	1"	5	25	C-300M	3"	-	1
C-125M	1 1/4"	-	10	C-350M	3 1/2"	-	1
C-150M	1 1/2"	-	10	C-400M	4"	-	1

THREADED CONDUIT BODIES TYPE LB - MALLEABLE IRON

Allows access to the interior of a conduit system for inspection, pulling, and maintenance

Features: Threaded body for Rigid/IMC conduit

Material: Malleable Iron

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
LB-50M	1/2"	10	50	LB-200M	2"	-	5
LB-75M	3/4"	10	50	LB-250M	2 1/2"	-	1
LB-100M	1"	5	25	LB-300M	3"	-	1
LB-125M	1 1/4"	-	10	LB-350M	3 1/2"	-	1
LB-150M	1 1/2"	-	10	LB-400M	4"	-	1

THREADED CONDUIT BODIES TYPE LL - MALLEABLE IRON

Allows access to the interior of a conduit system for inspection, pulling, and maintenance

Features: Threaded body for Rigid/IMC conduit

Material: Malleable Iron

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
LL-50M	1/2"	10	50	LL-200M	2"	-	5
LL-75M	3/4"	10	50	LL-250M	2 1/2"	-	1
LL-100M	1"	5	25	LL-300M	3"	-	1
LL-125M	1 1/4"	-	10	LL-350M	3 1/2"	-	1
LL-150M	1 1/2"	-	10	LL-400M	4"	-	1

THREADED CONDUIT BODIES TYPE LR - MALLEABLE IRON

Allows access to the interior of a conduit system for inspection, pulling, and maintenance

Features: Threaded body for Rigid/IMC conduit

Material: Malleable Iron

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
LR-50M	1/2"	10	50	LR-200M	2"	-	5
LR-75M	3/4"	10	50	LR-250M	2 1/2"	-	1
LR-100M	1"	5	25	LR-300M	3"	-	1
LR-125M	1 1/4"	-	10	LR-350M	3 1/2"	-	1
LR-150M	1 1/2"	-	10	LR-400M	4"	-	1

THREADED CONDUIT BODIES TYPE T - MALLEABLE IRON

Allows access to the interior of a conduit system for inspection, pulling, and maintenance

Features: Threaded body for Rigid/IMC conduit

Material: Malleable Iron

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
T-50M	1/2"	10	50	T-200M	2"	-	5
T-75M	3/4"	10	50	T-250M	2 1/2"	-	1
T-100M	1"	5	25	T-300M	3"	-	1
T-125M	1 1/4"	-	10	T-350M	3 1/2"	-	1
T-150M	1 1/2"	-	10	T-400M	4"	-	1

CONDUIT BODY COVERS STEEL

Encloses conduit body

Features: Supplied with screws

Material: Steel

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
SC-50	1/2"	25	250
SC-75	3/4"	25	250
SC-100	1"	20	250
SC-125	1 1/4" to 1 1/2"	25	100
SC-200	2"	-	50
SC-250	2 1/2" to 3"	-	10
SC-350	3 1/2" to 4"	-	10



CONDUIT BODY COVERS ALUMINUM

Encloses conduit body

Features: Supplied with screws

Material: Aluminum

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
AC-50	1/2"	25	250
AC-75	3/4"	25	250
AC-100	1"	20	250
AC-125	1 1/4" to 1 1/2"	25	100
AC-200	2"	-	50
AC-250	2 1/2" to 3"	-	10
AC-350	3 1/2" to 4"	-	10



CONDUIT BODY GASKETS NEOPRENE

Provides dust and raintight seal between conduit body and cover

Features: Fits all form 5 body types

Material: Neoprene

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
VG-50	1/2"	25	250
VG-75	3/4"	25	250
VG-100	1"	20	250
VG-125	1 1/4" to 1 1/2"	25	100
VG-200	2"	-	50
VG-250	2 1/2" to 3"	-	10
VG-350	3 1/2" to 4"	-	10

CONDUIT BODY WIRE FILL CHART

Die Cast Aluminum Conduit Bodies

Trade Size	Maximum Number of Conductors				
	LB	C	LL	LR	T
1/2"	N/A	N/A	N/A	N/A	N/A
3/4"	6 AWG	6 AWG	6 AWG	6 AWG	6 AWG
1"	3 - 4 AWG	3 - 4 AWG	3 - 4 AWG	3 - 4 AWG	3 - 4 AWG
1 1/4"	3 - 2 AWG	3 - 2 AWG	3 - 2 AWG	3 - 2 AWG	3 - 2 AWG
1 1/2"	3 - 1/0 AWG	3 - 1/0 AWG	3 - 1/0 AWG	3 - 1/0 AWG	3 - 2 AWG
2"	3 - 4/0 AWG	3 - 2/0 AWG	3 - 4/0 AWG	3 - 4/0 AWG	3 - 4/0 AWG
2 1/2"	300 MCM	3 - 250 MCM	3 - 250 MCM	3 - 250 MCM	3 - 2/0 AWG
3"	350 MCM	3 - 250 MCM	3 - 250 MCM	3 - 250 MCM	3 - 250 MCM
3 1/2"	3 - 400 MCM	3 - 250 MCM	3 - 250 MCM	3 - 250 MCM	3 - 250 MCM
4"	3 - 400 MCM	3 - 250 MCM	3 - 250 MCM	3 - 250 MCM	3 - 250 MCM

Trade Size	Volume in Cu. In.				
	LB	C	LL	LR	T
1/2"	4.25	4.25	4.25	4.25	4.25
3/4"	7.2	7.2	7.2	7.2	7.2
1"	10.8	10.8	10.8	10.8	10.8
1 1/4"	30.5	30.5	30.5	30.5	30.5
1 1/2"	30.5	30.5	30.5	30.5	30.5
2"	70.7	70.7	70.7	70.7	70.7
2 1/2"	152.5	157.4	157.4	157.4	157.4
3"	152.5	179.8	179.8	179.8	179.8
3 1/2"	311.8	323.0	323.0	323.0	323.0
4"	311.8	323.0	323.0	323.0	323.0

Malleable Iron Conduit Bodies

Trade Size	Maximum Number of Conductors				
	LB	C	LL	LR	T
1/2"	N/A	N/A	N/A	N/A	N/A
3/4"	3 - 6 AWG	3 - 6 AWG	3 - 6 AWG	3 - 6 AWG	3 - 6 AWG
1"	3 - 4 AWG	3 - 4 AWG	3 - 4 AWG	3 - 4 AWG	3 - 4 AWG
1 1/4"	3 - 2 AWG	3 - 2 AWG	3 - 2 AWG	3 - 2 AWG	3 - 2 AWG
1 1/2"	3 - 1/0 AWG	3 - 1/0 AWG	3 - 1/0 AWG	3 - 1/0 AWG	3 - 1 AWG
2"	3 - 3/0 AWG	3 - 4/0 AWG	3 - 4/0 AWG	3 - 4/0 AWG	3 - 2/0 AWG
2 1/2"	3 - 250 MCM	3 - 300 MCM	3 - 300 MCM	3 - 300 MCM	3 - 4/0 AWG
3"	3 - 250 MCM	3 - 350 MCM	3 - 350 MCM	3 - 350 MCM	3 - 4/0 AWG
3 1/2"	3 - 350 MCM	3 - 350 MCM	3 - 350 MCM	3 - 500 MCM	3 - 350 MCM
4"	3 - 350 MCM	3 - 350 MCM	3 - 350 MCM	3 - 500 MCM	3 - 350 MCM

Trade Size	Volume in Cu. In.				
	LB	C	LL	LR	T
1/2"	4.5	4.5	4.5	4.5	6.0
3/4"	7.5	7.5	7.5	7.5	9.5
1"	12.5	12.5	12.5	12.5	15.0
1 1/4"	32.3	32.3	32.3	32.3	33.0
1 1/2"	35.3	35.3	35.3	35.3	36.0
2"	73.0	73.0	73.0	73.0	75.0
2 1/2"	138.0	138.0	138.0	138.0	138.0
3"	170.0	170.0	170.0	170.0	170.0
3 1/2"	300.0	300.0	300.0	300.0	300.0
4"	328.0	328.0	328.0	328.0	328.0

RIGID SET SCREW CONNECTORS MALLEABLE IRON

Connects threadless Rigid/IMC conduit to box or enclosure

Features: Concrete-tight when taped
Material: Malleable Iron
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
970MA	1/2"	25	250	975MA	2"	2	10
971MA	3/4"	25	100	976MA	2 1/2"	2	10
972MA	1"	5	25	977MA	3"	1	5
973MA	1 1/4"	5	25	978MA	3 1/2"	-	5
974MA	1 1/2"	5	20	979MA	4"	-	5

RIGID SET SCREW COUPLINGS MALLEABLE IRON

Connects two lengths of threadless Rigid/IMC conduit

Features: Concrete-tight when taped
Material: Malleable Iron
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
990MA	1/2"	20	100	995MA	2"	2	10
991MA	3/4"	20	100	996MA	2 1/2"	2	10
992MA	1"	5	50	997MA	3"	1	5
993MA	1 1/4"	5	25	998MA	3 1/2"	1	5
994MA	1 1/2"	5	20	999MA	4"	1	5

RIGID COMPRESSION CONNECTORS MALLEABLE IRON

Connects threadless Rigid/IMC conduit to box or enclosure

Features: Concrete-tight
Material: Malleable Iron
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
960MA	1/2"	25	250	965MA	2"	5	25
961MA	3/4"	25	250	966MA	2 1/2"	1	10
962MA	1"	10	100	967MA	3"	1	5
963MA	1 1/4"	5	50	968MA	3 1/2"	1	5
964MA	1 1/2"	2	20	969MA	4"	1	5

RIGID COMPRESSION COUPLINGS MALLEABLE IRON

Connects two lengths of threadless Rigid/IMC conduit

Features: Concrete-tight
Material: Malleable Iron
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
980MA	1/2"	20	100	985MA	2"	2	10
981MA	3/4"	20	100	986MA	2 1/2"	2	10
982MA	1"	5	50	987MA	3"	1	5
983MA	1 1/4"	5	25	988MA	3 1/2"	1	5
984MA	1 1/2"	5	20	989MA	4"	1	5

RIGID COMPRESSION CONNECTORS- STEEL

Use to connect threadless Rigid/IMC conduit to a box or enclosure

Features: Concrete-tight
Material: Steel
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
960	1/2"	25	250
961	3/4"	25	250
962	1"	10	100
963	1 1/4"	5	50
964	1 1/2"	5	20
965	2"	5	25

RIGID COMPRESSION COUPLINGS - STEEL

Connects two unthreaded lengths of Rigid/IMC conduit

Features: Concrete-tight
Material: Steel
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
980	1/2"	25	250
981	3/4"	10	100
982	1"	5	50
983	1 1/4"	5	50
984	1 1/4"	2	20
985	2"	4	20

WATERTIGHT HUBS ZINC DIE CAST

To connect Rigid/IMC conduit to a box or enclosure where a watertight joint is required

Features: Raintight, Oiltight, Dust tight w/insulated throat
Material: Zinc
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
WH-1	1/2"	25	250	WH-6	2"	2	20
WH-2	3/4"	25	250	WH-7	2 1/2"	-	10
WH-3	1"	10	100	WH-8	3"	-	10
WH-4	1 1/4"	5	25	WH-9	3 1/2"	-	5
WH-5	1 1/2"	2	20	WH-10	4"	-	5

WATERTIGHT HUBS MALLEABLE IRON

To connect Rigid/IMC conduit to a box or enclosure where a watertight joint is required

Features: Raintight, Oiltight, Dust tight w/insulated throat
Material: Malleable Iron
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
WH-1M	1/2"	25	250	WH-6M	2"	2	20
WH-2M	3/4"	25	250	WH-7M	2 1/2"	-	10
WH-3M	1"	10	100	WH-8M	3"	-	10
WH-4M	1 1/4"	5	25	WH-9M	3 1/2"	-	5
WH-5M	1 1/2"	2	20	WH-10M	4"	-	5

RIGID THREE-PIECE COUPLINGS

Connects two lengths of Rigid/IMC conduit when conduit cannot be turned

Features: Concrete-tight
Material: Malleable Iron
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
370	1/2"	25	100	376	2 1/2"	-	10
371	3/4"	20	200	377	3"	-	10
372	1"	10	100	378	3 1/2"	-	5
373	1 1/4"	5	100	379	4"	-	5
374	1 1/2"	4	25	381	5"	-	1
375	2"	4	20	382	6"	-	1

SLIP-ON COUPLINGS

To join two lengths of threaded Rigid/IMC conduit

Features: Neoprene gasket provides a concrete seal at the joint
Material: Malleable Iron
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
375SPC	2"	5	25
376SPC	2 1/2"	2	20
377SPC	3"	2	20
378SPC	3 1/2"	1	5
379SPC	4"	1	5
381SPC	5"	-	1
382SPC	6"	-	1

COMBINATION COUPLINGS RIGID TO LIQUIDTIGHT

Connects Liquidtight conduit to Rigid/IMC conduit

Features: Liquidtight, Raintight, Oiltight
Material: Steel
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
RTCC-50	1/2"	20	200
RTCC-75	3/4"	10	100

RIGID CONDUIT COUPLINGS

Use to join and ensure proper alignment of threaded Rigid/IMC conduit

Features: NPSM thread
Material: Steel
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
P105	1/2"	10	100	P120	2"	5	25
P107	3/4"	5	50	P125	2 1/2"	-	12
P110	1"	5	50	P130	3"	-	12
P112	1 1/4"	5	25	P140	4"	-	6
P115	1 1/2"	5	25				

RIGID 90° CONDUIT ELBOWS

Provides a directional change in an EMT conduit run

Features: Low conductivity, high corrosion resistance
Material: Steel
Certifications: cULus



Catalog Number	Trade Size	Radius Min	Length of Straight Min.	Offset Min.	Standard Pkg.
RLB-9050	1/2"	4"	1 1/2"	5 1/2"	50
RLB-9075	3/4"	4 1/2"	1 1/2"	6"	50
RLB-90100	1"	5 3/4"	1 7/8"	7 5/8"	25
RLB-90125	1 1/4"	7 1/4"	2"	9 1/4"	20
RLB-90150	1 1/2"	8 1/4"	2"	10 1/4"	15
RLB-90200	2"	9 1/2"	2"	11 1/2"	10
RLB-90250	2 1/2"	10 1/2"	3"	13 1/2"	1
RLB-90300	3"	13"	3 1/8"	16 1/8"	1
RLB-90400	4"	16"	3 3/8"	19 3/8"	1

RIGID 45° CONDUIT ELBOWS

Provides a directional change in an EMT conduit run

Features: Low conductivity, high corrosion resistance
Material: Steel
Certifications: cULus



Catalog Number	Trade Size	Radius Min	Length of Straight Min.	Offset Min.	Standard Pkg.
RLB-4550	1/2"	4"	1 1/2"	5 3/8"	50
RLB-4575	3/4"	4 1/2"	1 1/2"	5 3/4"	50
RLB-45100	1"	5 3/4"	1 7/8"	7 1/4"	25
RLB-45125	1 1/4"	7 1/4"	2"	8 1/2"	20
RLB-45150	1 1/2"	8 1/4"	2"	9 1/4"	15
RLB-45200	2"	9 1/2"	2"	10 1/8"	10
RLB-45250	2 1/2"	10 1/2"	3"	12 1/2"	1
RLB-45300	3"	13"	3 1/8"	14 1/2"	1
RLB-45400	4"	16"	3 3/8"	17 1/8"	1

RIGID CONDUIT NIPPLES

Extends a conduit system or connects two steel boxes or other metal enclosure

Features: Threaded on both ends
Material: Steel
Certifications: cULus



1/2" TRADE SIZE

Catalog Number	Length	Standard Pkg.	Catalog Number	Length	Standard Pkg.
P10500	CLOSE	25	P10550	5"	25
P10515	1 1/2"	25	P10560	6"	25
P10520	2"	25	P10580	8"	25
P10525	2 1/2"	25	P10510	10"	25
P10530	3"	25	P10512	12"	25
P10540	4"	25			

RIGID CONDUIT NIPPLES

Extends a conduit system or connects two steel boxes or other metal enclosure

Features: Threaded on both ends
Material: Steel
Certifications: cULus



3/4" TRADE SIZE

Catalog Number	Length	Standard Pkg.	Catalog Number	Length	Standard Pkg.
P10700	CLOSE	25	P10750	5"	25
P10715	1 1/2"	25	P10760	6"	25
P10720	2"	25	P10780	8"	25
P10725	2 1/2"	25	P10710	10"	25
P10730	3"	25	P10712	12"	25
P10740	4"	25			


RIGID CONDUIT NIPPLES

Extends a conduit system or connects two steel boxes or other metal enclosure

Features: Threaded on both ends

Material: Steel

Certifications: cULus



1" TRADE SIZE

Catalog Number	Length	Standard Pkg.	Catalog Number	Length	Standard Pkg.
P11000	CLOSE	25	P11060	6"	25
P11020	2"	25	P11080	8"	25
P11030	3"	25	P11010	10"	25
P11040	4"	25	P11012	12"	25
P11050	5"	25			


RIGID CONDUIT NIPPLES

Extends a conduit system or connects two steel boxes or other metal enclosure

Features: Threaded on both ends

Material: Steel

Certifications: cULus



1 1/4" TRADE SIZE

Catalog Number	Length	Standard Pkg.	Catalog Number	Length	Standard Pkg.
P11200	CLOSE	25	P11260	6"	25
P11220	2"	25	P11280	8"	25
P11230	3"	25	P11210	10"	25
P11240	4"	25	P11212	12"	25
P11250	5"	25			


RIGID CONDUIT NIPPLES

Extends a conduit system or connects two steel boxes or other metal enclosure

Features: Threaded on both ends

Material: Steel

Certifications: cULus



1 1/2" TRADE SIZE

Catalog Number	Length	Standard Pkg.	Catalog Number	Length	Standard Pkg.
P11500	CLOSE	25	P11560	6"	25
P11520	2"	25	P11580	8"	25
P11530	3"	25	P11510	10"	25
P11540	4"	25	P11512	12"	20
P11550	5"	25			


RIGID CONDUIT NIPPLES

Extends a conduit system or connects two steel boxes or other metal enclosure

Features: Threaded on both ends

Material: Steel

Certifications: cULus



2" TRADE SIZE

Catalog Number	Length	Standard Pkg.	Catalog Number	Length	Standard Pkg.
P12000	CLOSE	25	P12060	6"	25
P12025	2 1/2"	25	P12080	8"	25
P12030	3"	25	P12010	10"	10
P12040	4"	25	P12012	12"	10
P12050	5"	25			


RIGID CONDUIT NIPPLES

Extends a conduit system or connects two steel boxes or other metal enclosure

Features: Threaded on both ends

Material: Steel

Certifications: cULus



2 1/2" TRADE SIZE

Catalog Number	Length	Standard Pkg.	Catalog Number	Length	Standard Pkg.
P12500	CLOSE	10	P12560	6"	10
P12530	3"	10	P12580	8"	10
P12540	4"	10	P12510	10"	5
P12550	5"	10	P12512	12"	5


RIGID CONDUIT NIPPLES

Extends a conduit system or connects two steel boxes or other metal enclosure

Features: Threaded on both ends

Material: Steel

Certifications: cULus



3" TRADE SIZE

Catalog Number	Length	Standard Pkg.	Catalog Number	Length	Standard Pkg.
P13000	CLOSE	10	P13060	6"	10
P13030	3"	10	P13080	8"	5
P13040	4"	10	P13010	10"	5
P13050	5"	10	P13012	12"	5


RIGID CONDUIT NIPPLES

Extends a conduit system or connects two steel boxes or other metal enclosure

Features: Threaded on both ends

Material: Steel

Certifications: cULus



4" TRADE SIZE

Catalog Number	Length	Standard Pkg.	Catalog Number	Length	Standard Pkg.
P14000	CLOSE	10	P14080	8"	3
P14040	4"	6	P14010	10"	3
P14050	5"	6	P14012	12"	3
P14060	6"	5			

INSULATED GROUNDING BUSHINGS - W/LAY-IN LUG

Use with locknut to terminate service conduit to a cabinet

Features: For use with either copper or aluminum grounding conductor

Material: Malleable Iron

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
MIGB-80M	1/2"	100	1,000	MIGB-86M	2 1/2"	-	10
MIGB-81M	3/4"	50	500	MIGB-87M	3"	-	10
MIGB-82M	1"	25	250	MIGB-88M	3 1/2"	-	10
MIGB-83M	1 1/4"	25	250	MIGB-89M	4"	-	10
MIGB-84M	1 1/2"	25	250	MIGB-101M	5"	-	5
MIGB-85M	2"	25	250	MIGB-102M	6"	-	5

INSULATED BUSHINGS MALLEABLE IRON

Use with locknut to terminate threaded Rigid/IMC conduit to an outlet

Features: Insulated liner rated at 150° C
Material: Malleable Iron
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
MIB-90M	1/2"	100	1,000	MIB-96M	2 1/2"	-	25
MIB-91M	3/4"	100	1,000	MIB-97M	3"	-	25
MIB-92M	1"	50	500	MIB-98M	3 1/2"	-	25
MIB-93M	1 1/4"	25	250	MIB-99M	4"	-	25
MIB-94M	1 1/2"	25	250	MIB-101M	5"	-	10
MIB-95M	2"	25	100	MIB-102M	6"	-	10

INSULATING BUSHINGS PLASTIC

Use with locknut to terminate threaded Rigid/IMC conduit to an outlet

Features: Rated flame retardant to 105° C
Material: Polypropylene
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
501	1/2"	100	1,000	507	2 1/2"	-	25
502	3/4"	100	1,000	508	3"	-	25
503	1"	50	500	509	3 1/2"	-	25
504	1 1/4"	25	250	510	4"	-	25
505	1 1/2"	25	250	512	5"	-	5
506	2"	10	100	513	6"	-	5

RIGID ONE HOLE STRAPS STEEL

Supports Rigid/IMC conduit to mounting surface

Features: Reinforced snap-on feature
Material: Steel
Certifications: cULus
* Dual rated for EMT and Rigid



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
160-S	1/4"	100	1,000	166-S	1 1/2"	50	250
161-S	3/8"	100	1,000	167-S	2"	-	50
162-S	1/2"	100	1,000	*168-S	2 1/2"	-	25
163-S	3/4"	100	1,000	*169-S	3"	-	25
164-S	1"	50	500	*170-S	3 1/2"	-	10
165-S	1 1/4"	50	500	*171-S	4"	-	10

RIGID TWO HOLE STRAPS STEEL

Supports Rigid/IMC conduit to mounting surface

Features: Reinforced snap-on feature
Material: Steel
Certifications: cULus
* Dual rated for EMT and Rigid



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
TH-161S	3/8"	50	500	*TH-168S	2 1/2"	-	25
TH-162S	1/2"	-	250	*TH-169S	3"	-	25
TH-163S	3/4"	-	200	*TH-170S	3 1/2"	-	10
TH-164S	1"	-	100	*TH-171S	4"	-	10
TH-165S	1 1/4"	-	50	TH-173S	5"	-	10
TH-166S	1 1/2"	-	50	TH-174S	6"	-	10
TH-167S	2"	-	25				

RIGID ONE HOLE STRAPS MALLEABLE IRON

Supports Rigid/IMC conduit to mounting surface

Features: Heavy duty casting
Material: Malleable Iron
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
162	1/2"	100	1,000	167	2"	-	50
163	3/4"	100	1,000	168	2 1/2"	-	25
164	1"	50	500	169	3"	-	25
165	1 1/4"	50	500	170	3 1/2"	-	25
166	1 1/2"	-	50	171	4"	-	10

RIGID CLAMP BACK SPACERS

Provides space between conduit and mounting surface

Features: Extensive size range for multiple specifications
Material: Malleable Iron
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
282	1/2"	100	1,000	287	2"	10	50
283	3/4"	100	500	288	2 1/2"	-	25
284	1"	50	500	289	3"	-	25
285	1 1/4"	50	250	290	3 1/2"	-	10
286	1 1/2"	20	100	291	4"	-	10

REDUCING BUSHINGS - STEEL

Use to reduce the size of internal female threads

Features: Rounded bushing protects conductors
Material: Steel
Certifications: cULus



Catalog Number	Trade Size	Standard Pkg.	Catalog Number	Trade Size	Standard Pkg.
RB50-38	1/2" x 3/8"	200	RB150-75	1 1/2" x 3/4"	50
RB75-50	3/4" x 1/2"	200	RB150-100	1 1/2" x 1"	50
RB100-50	1" x 1/2"	100	RB150-125	1 1/2" x 1 1/4"	50
RB100-75	1" x 3/4"	100	RB200-50	2" x 1/2"	25
RB125-50	1 1/4" x 1/2"	50	RB200-75	2" x 3/4"	25
RB125-75	1 1/4" x 3/4"	50	RB200-100	2" x 1"	25
RB125-100	1 1/4" x 1"	50	RB200-125	2" x 1 1/4"	25
RB150-50	1 1/2" x 1/2"	50	RB200-150	2" x 1 1/2"	25

REDUCING BUSHINGS MALLEABLE IRON

Serves as short raceway between enclosures when used with a locknut

Features: Rounded bushing protects conductors
Material: Malleable Iron
Certifications: cULus



Catalog Number	Trade Size	Standard Pkg.	Catalog Number	Trade Size	Standard Pkg.
RB250-100	2 1/2" x 1"	10	RB300-250	3" x 2 1/2"	10
RB250-125	2 1/2" x 1 1/4"	10	RB350-200	3 1/2" x 2"	5
RB250-150	2 1/2" x 1 1/2"	10	RB350-250	3 1/2" x 2 1/2"	5
RB250-200	2 1/2" x 2"	10	RB350-300	3 1/2" x 3"	5
RB300-100	3" x 1"	10	RB400-200	4" x 2"	5
RB300-125	3" x 1 1/4"	10	RB400-250	4" x 2 1/2"	5
RB300-150	3" x 1 1/2"	10	RB400-300	4" x 3"	5
RB300-200	3" x 2"	10	RB400-350	4" x 3 1/2"	5

REDUCING WASHERS

To be used to reduce the size of knockout holes

Material: Steel
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
RW75-50	3/4" x 1/2"	250	2,500	RW300-100	3" x 1"	25	250
RW100-50	1" x 1/2"	250	2,500	RW300-125	3" x 1 1/4"	25	250
RW100-75	1" x 3/4"	250	2,500	RW300-150	3" x 1 1/2"	25	250
RW125-50	1 1/4" x 1/2"	100	1,000	RW300-200	3" x 2"	25	250
RW125-75	1 1/4" x 3/4"	100	1,000	RW300-250	3" x 2 1/2"	25	250
RW125-100	1 1/4" x 1"	100	1,000	RW350-50	3 1/2" x 1/2"	10	100
RW150-50	1 1/2" x 1/2"	100	1,000	RW350-75	3 1/2" x 3/4"	10	100
RW150-75	1 1/2" x 3/4"	100	1,000	RW350-100	3 1/2" x 1"	10	100
RW150-100	1 1/2" x 1"	100	1,000	RW350-125	3 1/2" x 1 1/4"	10	100
RW150-125	1 1/2" x 1 1/4"	100	1,000	RW350-150	3 1/2" x 1 1/2"	10	100
RW200-50	2" x 1/2"	50	500	RW350-200	3 1/2" x 2"	10	100
RW200-75	2" x 3/4"	50	500	RW350-250	3 1/2" x 2 1/2"	10	100
RW200-100	2" x 1"	50	500	RW350-300	3 1/2" x 3"	10	100
RW200-125	2" x 1 1/4"	50	500	RW400-50	4" x 1/2"	10	100
RW200-150	2" x 1 1/2"	50	500	RW400-75	4" x 3/4"	10	100
RW250-50	2 1/2" x 1/2"	50	500	RW400-100	4" x 1"	10	100
RW250-75	2 1/2" x 3/4"	50	500	RW400-125	4" x 1 1/4"	10	100
RW250-100	2 1/2" x 1"	50	500	RW400-150	4" x 1 1/2"	10	100
RW250-125	2 1/2" x 1 1/4"	50	500	RW400-200	4" x 2"	10	100
RW250-150	2 1/2" x 1 1/2"	50	500	RW400-250	4" x 2 1/2"	10	100
RW250-200	2 1/2" x 2"	50	500	RW400-300	4" x 3"	10	100
RW300-50	3" x 1/2"	25	250	RW400-350	4" x 3 1/2"	10	100
RW300-75	3" x 3/4"	25	250				

CONDUIT LOCKNUTS

Use to fasten threaded conduit to an opening in a box or enclosure

Features: Tightens without deforming
Material: Steel
* Square fixture nut
** Square panel nut



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
*199	1/4"	100	3,000	206	2"	50	500
**200	3/8"	250	2,500	207	2 1/2"	50	250
201	1/2"	100	3,000	208	3"	50	250
202	3/4"	100	1,000	209	3 1/2"	25	125
203	1"	100	1,000	210	4"	25	125
204	1 1/4"	100	1,000	212	5"	-	10
205	1 1/2"	100	1,000	213	6"	-	10

SEALING LOCKNUTS

Provides a raintight seal when fastening threaded conduit to threadless opening in a box or enclosure

Features: Zinc plate with molded PVC gasket for a watertight seal
Material: Steel/Neoprene Gasket
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
201SL	1/2"	100	1,000	206SL	2"	25	100
202SL	3/4"	50	500	207SL	2 1/2"	20	100
203SL	1"	25	250	208SL	3"	10	50
204SL	1 1/4"	25	250	209SL	3 1/2"	10	50
205SL	1 1/2"	25	100	210SL	4"	5	25

GROUNDING LOCKNUTS

Use to fasten threaded conduit to an opening in a box or enclosure

Features: For use in harsh vibration environments
Material: Steel
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
GL-50	1/2"	100	1,000	GL-250	2 1/2"	10	100
GL-75	3/4"	100	1,000	GL-300	3"	10	100
GL-100	1"	50	500	GL-350	3 1/2"	10	100
GL-125	1 1/4"	50	500	GL-400	4"	10	100
GL-150	1 1/2"	50	500	GL-500	5"	-	10
GL-200	2"	25	250				

RIGID TO BOX 90° PULL ELBOWS

Connects threaded Rigid/IMC conduit to a steel box or enclosure for a 90° bend

Features: Removable cover facilitates wire pulling
Material: Zinc
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
650	1/2"	10	100
651	3/4"	5	50

RIGID TO RIGID 90° PULL ELBOWS

Connects threaded Rigid/IMC conduit to a steel box or enclosure for a 90° bend

Features: Removable cover facilitates wire pulling
Material: Zinc
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
670	1/2"	10	100
671	3/4"	5	50
672	1"	-	25
673	1 1/4"	-	20

RIGID 90° SHORT ELBOWS

Connects Rigid/IMC conduit to outlet box

Features: Appropriate where close radius is required
Material: Zinc
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
780-DC	1/2"	50	500
781-DC	3/4"	25	250

RIGID 90° LONG ELBOWS

Telephone elbow for Rigid/IMC conduit



Features: Accurately tapped & tapered thread
Material: Malleable Iron

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
800	1/2"	10	100
801	3/4"	10	100
802	1"	5	50
803	1 1/4"	5	25

COUNTERSUNK INSERT PLUGS

For use with end wrench



Features: NPT threads
Material: Malleable Iron

Catalog Number	Trade Size	Standard Pkg.	Catalog Number	Trade Size	Standard Pkg.
1010C	1/2"	100	1015C	2"	25
1011C	3/4"	100	1016C	2 1/2"	10
1012C	1"	100	1017C	3"	10
1013C	1 1/4"	50	1018C	3 1/2"	5
1014C	1 1/2"	50	1019C	4"	5

CONDUIT NIPPLES - ZINC

Serves as short raceway between enclosures when used with a locknut



Features: Corrosion resistant
Material: Zinc
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
332	1/2"	100	1,000	337	2"	10	40
333	3/4"	50	500	338	2 1/2"	-	10
334	1"	25	250	339	3"	-	10
335	1 1/4"	25	250	340	3 1/2"	-	10
336	1 1/2"	25	100	341	4"	-	10

FLANGE PLATES

Use with threaded conduit for mounting to flat surfaces



Features: Heavy Iron construction
Material: Malleable Iron
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
850	1/2"	20	100
851	3/4"	20	100
852	1"	10	100
853	1 1/4"	-	50
854	1 1/2"	-	50
855	2"	-	50

CONDUIT NIPPLES MALLEABLE IRON

Serves as short raceway between enclosures when used with a locknut



Features: Corrosion resistant
Material: Malleable Iron
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
332M	1/2"	100	1,000	338M	2 1/2"	-	10
333M	3/4"	50	500	339M	3"	-	10
334M	1"	25	250	340M	3 1/2"	-	10
335M	1 1/4"	25	250	341M	4"	-	10
336M	1 1/2"	25	100	343M	5"	-	5
337M	2"	10	40	344M	6"	-	5

MALE ENLARGERS

Converts conduit end sizes, eliminates rework or tear outs



Features: Helps to better accommodate design specs
Material: Malleable Iron
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
61ME	1/2"M x 3/4"F	20	100
63ME	3/4"M x 1"F	20	100
66ME	1"M x 1 1/4"F	10	100
70ME	1 1/4"M x 1 1/2"F	-	50
74ME	1 1/4"M x 2"F	-	50
75ME	1 1/2"M x 2"F	-	50

OFFSET CONDUIT NIPPLES

Use to offset the axis of a raceway 3/4" between enclosure runs



Features: Enable an easier direction change of conduit
Material: Zinc
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
830	1/2"	10	100	834	1 1/2"	5	50
831	3/4"	10	100	835	2"	2	20
832	1"	10	100	836	2 1/2"	-	2
833	1 1/4"	5	50	837	3"	-	2

HAZARDOUS LOCATIONS FITTINGS

FLEXIBLE COUPLINGS

OUTLET BOXES

CONDUIT BODIES

CAPPED ELBOWS

UNIONS

SEALING FITTINGS



FC-18

EXPLOSION PROOF FLEXIBLE COUPLINGS

Features:

- All sizes are manufactured from bronze braided brass tubing with an arc resistant liner, assembled with two female threaded End fittings and two male Nipples – Type ECGJH
- Corrosion resistant and watertight
- Custom lengths available upon request


Note: Third party certification not available for lengths exceeding 36" in any size

Applications:

- Accomplishing difficult bends
- Movement of connected fixtures
- Vibration of connected equipment (as motors)

UL listed for use in Hazardous Locations:

- 1/2", 3/4"
- Class I, Groups A, B, C, D
- Class II, Groups E, F, G
- 1", 1-1/2", 2"
- Class I, Groups C, D
- Class II, Groups E, F, G
- 1-1/4"
- Class I, Group D
- Class II, Group E, F, G



Note: Flexible Length does not include fittings.

Catalog No.	Size	Flexible Length	Pkg Wt.	Dim. A	Dim. B
FC-14	1/2"	4"	1.0	1.54	1.44
FC-16	1/2"	6"	1.2	1.54	1.44
FC-18	1/2"	8"	1.4	1.54	1.44
FC-110	1/2"	10"	1.6	1.54	1.44
FC-112	1/2"	12"	1.8	1.54	1.44
FC-115	1/2"	15"	2.1	1.54	1.44
FC-118	1/2"	18"	2.4	1.54	1.44
FC-121	1/2"	21"	2.7	1.54	1.44
FC-124	1/2"	24"	3.0	1.54	1.44
FC-127	1/2"	27"	3.3	1.54	1.44
FC-130	1/2"	30"	3.6	1.54	1.44
FC-133	1/2"	33"	3.9	1.54	1.44
FC-136	1/2"	36"	4.2	1.54	1.44
FC-24	3/4"	4"	1.2	1.60	1.87
FC-26	3/4"	6"	1.4	1.60	1.87
FC-28	3/4"	8"	1.7	1.60	1.87
FC-210	3/4"	10"	2.0	1.60	1.87
FC-212	3/4"	12"	2.2	1.50	1.87
FC-215	3/4"	15"	2.6	1.60	1.87
FC-218	3/4"	18"	3.0	1.60	1.87
FC-221	3/4"	21"	3.4	1.60	1.87
FC-224	3/4"	24"	3.8	1.60	1.87
FC-227	3/4"	27"	4.2	1.60	1.87
FC-230	3/4"	30"	4.6	1.60	1.87
FC-233	3/4"	33"	5.0	1.60	1.87
FC-236	3/4"	36"	5.3	1.60	1.87
FC-36	1"	6"	2.7	2.00	2.31
FC-38	1"	8"	3.7	2.00	2.31
FC-310	1"	10"	4.6	2.00	2.31
FC-312	1"	12"	5.5	2.00	2.31
FC-315	1"	15"	6.1	2.00	2.31
FC-318	1"	18"	6.7	2.00	2.31

Catalog No.	Size	Flexible Length	Pkg Wt.	Dim. A	Dim. B
FC-321	1"	21"	7.3	2.00	2.31
FC-324	1"	24"	7.9	2.00	2.31
FC-327	1"	27"	8.5	2.00	2.31
FC-330	1"	30"	9.0	2.00	2.31
FC-333	1"	33"	9.7	2.00	2.31
FC-336	1"	36"	10.3	2.00	2.31
FC-412	1-1/4"	12"	7.2	2.12	2.74
FC-415	1-1/4"	15"	8.1	2.12	2.74
FC-418	1-1/4"	18"	9.0	2.12	2.74
FC-421	1-1/4"	21"	9.9	2.12	2.74
FC-424	1-1/4"	24"	10.8	2.12	2.74
FC-427	1-1/4"	27"	11.7	2.12	2.74
FC-430	1-1/4"	30"	12.6	2.12	2.74
FC-433	1-1/4"	33"	13.5	2.12	2.74
FC-436	1-1/4"	36"	14.4	2.12	2.74
FC-512	1-1/2"	12"	14.7	2.37	3.61
FC-515	1-1/2"	15"	16.8	2.37	3.61
FC-518	1-1/2"	18"	18.9	2.37	3.61
FC-521	1-1/2"	21"	21.0	2.37	3.61
FC-524	1-1/2"	24"	23.0	2.37	3.61
FC-527	1-1/2"	27"	25.0	2.37	3.61
FC-530	1-1/2"	30"	27.0	2.37	3.61
FC-533	1-1/2"	33"	29.0	2.37	3.61
FC-536	1-1/2"	36"	31.0	2.37	3.61
FC-612	2"	12"	15.0	2.41	4.33
FC-615	2"	15"	17.1	2.41	4.33
FC-618	2"	18"	19.2	2.41	4.33
FC-621	2"	21"	21.3	2.41	4.33
FC-624	2"	24"	23.3	2.41	4.33
FC-627	2"	27"	25.4	2.41	4.33
FC-630	2"	30"	27.3	2.41	4.33
FC-633	2"	33"	29.4	2.41	4.33
FC-636	2"	36"	31.3	2.41	4.33

EXPLOSION PROOF CONDUIT OUTLET BOX - TYPE C

Installed in conduit systems within hazardous areas to protect conductors in threaded rigid conduit

Features: Suitable for NEMA 4X applications

Material: Aluminum

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
GUAC-50A	1/2"	1	5
GUAC-75A	3/4"	1	5
GUAC-100A	1"	1	5

EXPLOSION PROOF CONDUIT OUTLET BOX - TYPE LB

Installed in conduit systems within hazardous areas to protect conductors in threaded rigid conduit

Features: Suitable for NEMA 4X applications

Material: Aluminum

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
GUAB-50A	1/2"	1	5
GUAB-75A	3/4"	1	5
GUAB-100A	1"	1	5

EXPLOSION PROOF CONDUIT OUTLET BOX - TYPE L

Installed in conduit systems within hazardous areas to protect conductors in threaded rigid conduit

Features: Suitable for NEMA 4X applications

Material: Aluminum

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
GUAL-50A	1/2"	1	5
GUAL-75A	3/4"	1	5
GUAL-100A	1"	1	5

EXPLOSION PROOF CONDUIT OUTLET BOX - TYPE T

Installed in conduit systems within hazardous areas to protect conductors in threaded rigid conduit

Features: Suitable for NEMA 4X applications

Material: Aluminum

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
GUAT-50A	1/2"	1	5
GUAT-75A	3/4"	1	5
GUAT-100A	1"	1	5

EXPLOSION PROOF CONDUIT BODIES - TYPE LB

Connects conduit lengths and changes direction of conduit while meeting classified area requirements

Features: Tapered hub threads for tight, rigid joints and ground continuity

Material: Aluminum

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
XLB-50	1/2"	5	25
XLB-75	3/4"	5	25

EXPLOSION PROOF CONDUIT BODIES - TYPE T

Connects conduit lengths and changes direction of conduit while meeting classified area requirements

Features: Tapered hub threads for tight, rigid joints and ground continuity

Material: Aluminum

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
XT-50	1/2"	5	25
XT-75	3/4"	5	25

EXPLOSION PROOF CAPPED ELLS

Makes 90° bends in conduit systems where space is limited and can serve as pulling fitting

Features: Screw-on cover for ease of installation and removal

Material: Ductile Iron

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
PLBY-50	1/2"	2	10
PLBY-75	3/4"	2	10
PLBY-100	1"	2	10
PLBY-125	1 1/4"	2	10

EXPLOSION PROOF UNIONS

Use for joining conduit and connecting conduit to enclosures in classified areas

Features: Accurately tapped threads for rigid joints and ground continuity

Material: Steel

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
UNF-50	1/2"	10	50
UNF-75	3/4"	5	25
UNF-100	1"	5	25

EXPLOSION PROOF - TYPE EYA SEALING FITTINGS - ALUMINUM

Prevents passage of gases, vapors, or flames from one portion of conduit system to another

Features: Dust ignition-proof, Raintight and restricts any explosion to the sealed off enclosure

Material: Aluminum

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
EYA-50A	1/2"	10	50
EYA-75A	3/4"	5	25
EYA-100A	1"	5	25

PACKING FIBER NON-ASBESTOS

Forms a dam between the bushing of the sealing fitting and the end of the conduit around the conductors entering the hub

Features: Packs easily to form around each conductor

Material: Ceramic Fiber

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
EYPF-4	4 oz. ctn.	1	10
EYPF-8	8 oz. ctn.	1	10
EYPF-16	1 lb. ctn.	-	1

EXPLOSION PROOF - TYPE EYA SEALING FITTINGS MALLEABLE IRON

Prevents passage of gases, vapors, or flames from one portion of conduit system to another

Features: Dust ignition-proof, Raintight and restricts any explosion to the sealed off enclosure

Material: Malleable Iron

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
EYA-50	1/2"	10	50
EYA-75	3/4"	5	25
EYA-100	1"	5	25

SEALING COMPOUND EXPLOSION PROOF FITTINGS

Forms a seal around electrical conductors and the inside of the sealing fitting to restrict the passage of gases and vapors

Features: Water soluble that can be easily mixed and poured

Material: Hydraulic Cement

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
EYSC-8	8 oz. tub	1	12
EYSC-16	16 oz. tub	1	12
EYSC-80	5 lb. tub	1	6
EYSC-160	10 lb. tub	1	4

EXPLOSION PROOF - TYPE EYS SEALING FITTINGS MALLEABLE IRON

Prevents passage of gases, vapors, or flames from one portion of conduit system to another

Features: Dust ignition-proof, Raintight and restricts any explosion to the sealed off enclosure

Material: Malleable Iron

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
EYS-1	1/2"	10	50
EYS-2	3/4"	5	25
EYS-3	1"	5	25

LIQUIDTIGHT FITTINGS

CONNECTORS
LIQUIDTIGHT CONDUIT
COMBINATION COUPLINGS



RT50-S

VISIT
WWW.PECO-ELECTRIC.COM
FOR MORE

STRAIGHT LIQUIDTIGHT CONNECTORS - STEEL

To secure and seal Liquidtight conduit to a box or enclosure

Features: Insulated throat protects conductors from abrasion damage

Material: Steel

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
RT-38S	3/8"	25	250
RT-50S	1/2"	25	250
RT-75S	3/4"	10	100
RT-100S	1"	5	50
RT-125S	1 1/4"	5	50
RT-150S	1 1/2"	10	50
RT-200S	2"	5	25

45° LIQUIDTIGHT CONNECTORS MALLEABLE IRON

To secure and seal Liquidtight conduit to a box or enclosure

Features: Insulated throat protects conductors from abrasion damage

Material: Malleable Iron

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
RT-45-38MA	3/8"	10	100	RT-45-200MA	2"	-	5
RT-45-50MA	1/2"	10	100	RT-45-250MA	2 1/2"	-	1
RT-45-75MA	3/4"	10	100	RT-45-300MA	3"	-	1
RT-45-100MA	1"	5	50	RT-45-350MA	3 1/2"	-	1
RT-45-125MA	1 1/4"	-	10	RT-45-400MA	4"	-	1
RT-45-150MA	1 1/2"	-	10				

STRAIGHT LIQUIDTIGHT CONNECTORS MALLEABLE IRON

To secure and seal Liquidtight conduit to a box or enclosure

Features: Insulated throat protects conductors from abrasion damage

Material: Malleable Iron

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
RT-38MA	3/8"	25	250	RT-200MA	2"	5	25
RT-50MA	1/2"	25	250	RT-250MA	2 1/2"	1	10
RT-75MA	3/4"	10	100	RT-300MA	3"	1	10
RT-100MA	1"	5	50	RT-350MA	3 1/2"	1	10
RT-125MA	1 1/4"	5	50	RT-400MA	4"	1	5
RT-150MA	1 1/2"	10	50				

STRAIGHT LIQUIDTIGHT CONNECTORS - ZINC

To secure and seal Liquidtight conduit to a box or enclosure

Features: Liquidtight, Raintight, Oiltight

Material: Zinc

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
RT-38	3/8"	25	250	RT-200	2"	5	25
RT-50	1/2"	25	250	RT-250	2 1/2"	-	1
RT-75	3/4"	10	100	RT-300	3"	-	1
RT-100	1"	5	50	RT-350	3 1/2"	-	1
RT-125	1 1/4"	5	50	RT-400	4"	-	1
RT-150	1 1/2"	10	50				

90° LIQUIDTIGHT CONNECTORS MALLEABLE IRON

To secure and seal Liquidtight conduit to a box or enclosure

Features: Insulated throat protects conductors from abrasion damage

Material: Malleable Iron

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
RT-90-38MA	3/8"	10	100	RT-90-200MA	2"	-	5
RT-90-50MA	1/2"	10	100	RT-90-250MA	2 1/2"	-	1
RT-90-75MA	3/4"	10	100	RT-90-300MA	3"	-	1
RT-90-100MA	1"	5	50	RT-90-350MA	3 1/2"	-	1
RT-90-125MA	1 1/4"	-	10	RT-90-400MA	4"	-	1
RT-90-150MA	1 1/2"	-	10				

90° LIQUIDTIGHT CONNECTORS ZINC

To secure and seal Liquidtight conduit to a box or enclosure

Features: Liquidtight, Raintight, Oiltight

Material: Zinc

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
RT-90-38	3/8"	10	100	RT-90-200	2"	-	5
RT-90-50	1/2"	10	100	RT-90-250	2 1/2"	-	1
RT-90-75	3/4"	10	100	RT-90-300	3"	-	1
RT-90-100	1"	5	50	RT-90-350	3 1/2"	-	1
RT-90-125	1 1/4"	-	10	RT-90-400	4"	-	1
RT-90-150	1 1/2"	-	10				

STRAIGHT LIQIDTIGHT CONNECTORS NON-METALLIC

To secure and seal Liquidtight conduit to a box or enclosure

Features: For use in wet or dry locations
Material: Nylon
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
NMLT-38	3/8"	25	100
NMLT-50	1/2"	25	100
NMLT-75	3/4"	10	100
NMLT-100	1"	10	50
NMLT-125	1 1/4"	5	25
NMLT-150	1 1/2"	2	10
NMLT-200	2"	2	10

90° LIQIDTIGHT CONNECTORS NON-METALLIC

To secure and seal Liquidtight conduit to a box or enclosure

Features: For use in wet or dry locations
Material: Nylon
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
NMLT-90-38	3/8"	25	100
NMLT-90-50	1/2"	25	100
NMLT-90-75	3/4"	10	100
NMLT-90-100	1"	10	50
NMLT-90-125	1 1/4"	5	25
NMLT-90-150	1 1/2"	2	10
NMLT-90-200	2"	2	10

LIQIDTIGHT CONDUIT NON-METALLIC

For use in wet locations, suitable for commercial and industrial use

Features: Sunlight resistant, approved for direct burial
Material: Nylon
Certifications: cULus



Catalog Number	Trade Size	Length	Unit Pkg.	Standard Pkg.
NMLC-50	1/2"	100'	-	1
NMLC-50R	1/2"	1000'	-	1
NMLC-75	3/4"	100'	-	1
NMLC-75R	3/4"	700'	-	1
NMLC-100	1"	100'	-	1
NMLC-100R	1"	500'	-	1
NMLC-125	1 1/4"	50'	-	1
NMLC-150	1 1/2"	50'	-	1
NMLC-200	2"	50'	-	1

COMBINATION COUPLINGS LIQIDTIGHT TO EMT CONDUIT

Connects Liquidtight conduit to EMT conduit

Features: Liquidtight, Raintight, Oiltight
Material: Steel
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
RT-260	1/2"	25	250
RT-261	3/4"	20	200

COMBINATION COUPLINGS RIGID TO LIQIDTIGHT

Connects Liquidtight conduit to Rigid/IMC conduit

Features: Liquidtight, Raintight, Oiltight
Material: Steel
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
RTCC-50	1/2"	20	200
RTCC-75	3/4"	10	100

CABLE CONNECTORS

SQUEEZE CONNECTORS
CLAMP TYPE CONNECTOR
NON-WATERTIGHT CONNECTORS
BX CONNECTORS
SADDLE TYPE CONNECTORS
DUPLEX CONNECTORS
COMBINATION COUPLINGS
TAKE-ALL CONNECTORS
STRAPS
SCREW-IN CONNECTORS
SNAP CONNECTORS
COMBINATION CONNECTOR
SET SCREW CONNECTOR



220

STRAIGHT SQUEEZE TYPE CONNECTORS - ZINC

Use to connect flexible metallic conduit and steel AC cable to a steel outlet box

Features: Rugged metallic construction ensures mechanical protection

Material: Zinc

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
220	3/8"	50	500
222	1/2"	25	250
223	3/4"	25	250
225	1"	10	100
226	1 1/4"	10	100
227	1 1/2"	5	50
228	2"	10	40

90° SQUEEZE TYPE CONNECTORS - ZINC

Use to connect flexible metallic conduit and steel AC cable to a steel outlet box

Features: Quality set screw design tightens fast and easy

Material: Zinc

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
40	3/8"	50	500
41	1/2"	25	250
42	3/4"	10	100
43	1"	5	50
44	1 1/4"	10	40
45	1 1/2"	-	10
46	2"	-	5

STRAIGHT SQUEEZE TYPE CONNECTORS MALLEABLE IRON

Use to connect flexible metallic conduit and steel AC cable to a steel outlet box

Features: Rugged metallic construction ensures mechanical protection

Material: Malleable Iron

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
220M	3/8"	25	250	228M	2"	-	10
222M	1/2"	25	250	229M	2 1/2"	-	5
223M	3/4"	25	250	230M	3"	-	5
225M	1"	10	100	231M	3 1/2"	-	1
226M	1 1/4"	10	100	232M	4"	-	1
227M	1 1/2"	-	10				

90° SQUEEZE TYPE CONNECTORS MALLEABLE IRON

Use to connect flexible metallic conduit and steel AC cable to a steel outlet box

Features: Rugged metallic construction ensures mechanical protection

Material: Malleable Iron

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
40M	3/8"	50	500	46M	2"	-	5
41M	1/2"	25	250	47M	2 1/2"	-	2
42M	3/4"	10	100	48M	3"	-	1
43M	1"	5	50	49M	3 1/2"	-	1
44M	1 1/4"	-	10	49M-A	4"	-	1
45M	1 1/2"	-	10				

NM CLAMP TYPE CABLE CONNECTOR

For connecting non-metallic cable to box or enclosure

Features: Assembled with die-cast locknut and tri-combo screws

Material: Zinc

Certifications: cULus

*For NMB and UF

** For corrugated, continuous corrugated, and aluminum smooth extended

MC cable: Diameter: .50, Range .345-.525



Catalog Number	Trade Size	Length	Unit Pkg.	Standard Pkg.
*135	3/8"	.18-.64	100	1,000
**135-C	3/8"	.18-.63	100	1,000

NON-WATERTIGHT CONNECTORS - ROUND CABLE

Use to connect non-metallic sheathed cable to a steel box or enclosure

Features: Round type for NMB, UF, SEU, and SER

Material: Zinc

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
105R	3/4"	50	500
106R	1"	25	250
107R	1 1/4"	10	100
108R	1 1/2"	10	100
109R	2"	5	50

NON-WATERTIGHT CONNECTORS - OVAL CABLE

Use to connect non-metallic sheathed cable to a steel box or enclosure

Features: Oval type for NMB, UF, SEU, and SER

Material: Zinc

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
108	1 1/2"	10	100
109	2"	10	50

SET SCREW BX CONNECTOR

Connects BX/steel flex to box or enclosure

Features: End stopped
Material: Zinc
Certifications: cULus



Catalog Number	Trade Size	Length	Unit Pkg.	Standard Pkg.
130	3/8"	14/2 to 10/3	100	1,000

SADDLE TYPE CONNECTOR

Use to connect NM, armored or metal clad cable to box or enclosure

Features: Dry location necessary when used with MC cable
Material: Zinc
Certifications: cULus



Catalog Number	Trade Size	Length	Unit Pkg.	Standard Pkg.
132	3/8"	14/2 to 10/3	50	500

DUPLEX CONNECTOR CLAMP TYPE

Use to connect two pieces of FMC, AC, MC, or NM sheathed cable to box or enclosure using one knockout

Features: Dry location only
Material: Zinc
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
6	3/8"	25	250

DUPLEX BX CONNECTOR SINGLE SCREW

Use to connect flexible metallic conduit or armored cable to box or enclosure

Features: Dry location only
Material: Zinc
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
8	3/8"	25	250

COMBINATION COUPLINGS -EMT TO FLEXIBLE CONDUIT

Connects EMT conduit to flexible metal conduit

Features: Set-screw to clamp type
Material: Zinc
Certifications: cULus
 * Product Approved for EMT to NM cable



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
*685	1/2" EMT to 3/8" Flex	10	100
686	1/2" EMT to 1/2" Flex	10	100
687	3/4" EMT to 3/4" Flex	10	100

TAKE-ALL CONNECTORS

Use to connect MC, AC, NM, and round SE into a box or enclosure

Features: Indoor dry location use only
Material: Zinc
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
TAC-50	1/2"	25	250
TAC-75	3/4"	20	200
TAC-100	1"	10	100
TAC-125	1 1/4"	10	100

SET SCREW TYPE CONNECTOR FOR FLEXIBLE CONDUIT

Connects flexible metal conduit to box or enclosure

Features: For use with steel only
Material: Zinc
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
938	1/2"	25	250

BX STRAP - ONE HOLE

To securely affix cables, tubing, and pipe

Features: Inverted rib provides extra strength
Material: Steel
Certifications: cULus



Catalog Number	Trade Size	Length	Unit Pkg.	Standard Pkg.
BX-50	3/8"	14/2 to 12/3	100	1,000
GWS-8	1/4" Mini	14/2 to 12/3	100	1,000

SNAP CONNECTORS

Use to join sheathed cable into box or enclosure

Features: Single-unit or duplex construction with captive clamp
Material: Steel
Certifications: cULus



Catalog Number	Trade Size	Length	Unit Pkg.	Standard Pkg.
MC-50	3/8" AC/MC SINGLE	10	100	
MC-50D	3/8" AC/MC DOUBLE	10	100	

STRAIN RELIEF CORD GRIPS

STRAIGHT
CONNECTORS



CG-50-A250

STRAIGHT STRAIN RELIEF CORD CONNECTORS

Secures & seals cords or cables entering enclosures or raceways

Features: Provides excellent strain relief and prevents cable pullout


Material: Steel

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
CG-50-A250	1/2"	25	100	CG-100-B750	1"	10	100
CG-50-A350	1/2"	25	100	CG-100-B850	1"	10	100
CG-50-A450	1/2"	25	100	CG-100-C950	1"	10	100
CG-50-A560	1/2"	25	100	CG-100-C1050	1"	10	100
CG-50-A650	1/2"	25	100	CG-125-C850	1 1/4"	5	50
CG-75-A250	3/4"	25	100	CG-125-C950	1 1/4"	5	50
CG-75-A350	3/4"	25	100	CG-125-D1050	1 1/4"	5	50
CG-75-A450	3/4"	25	100	CG-125-D1150	1 1/4"	5	50
CG-75-A560	3/4"	25	100	CG-125-D1250	1 1/4"	5	50
CG-75-A650	3/4"	25	100	CG-125-D1375	1 1/4"	5	50
CG-75-B750	3/4"	25	100	CG-150-D1050	1 1/2"	5	25
CG-75-B850	3/4"	25	100	CG-150-D1150	1 1/2"	5	25
CG-100-B560	1"	10	100	CG-150-D1250	1 1/2"	5	25
CG-100-B650	1"	10	100	CG-150-D1375	1 1/2"	5	25

DISCOVER THE PECO DIFFERENCE

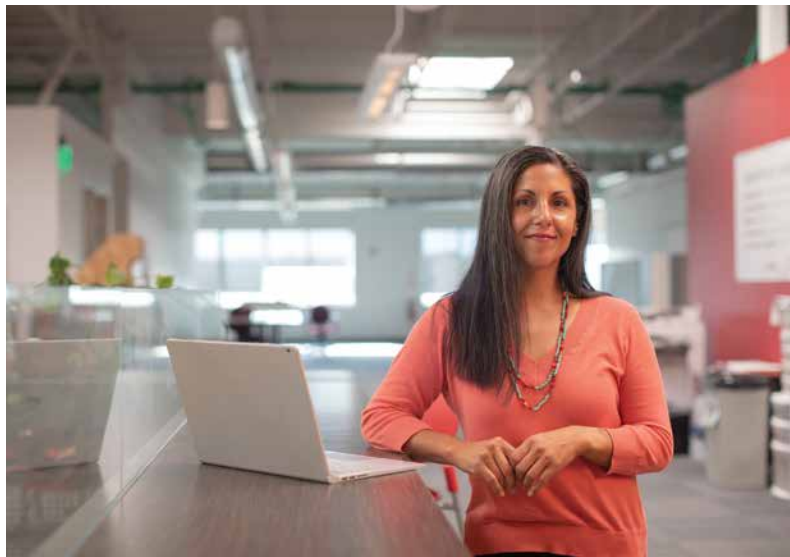

EXCEPTIONAL CUSTOMER SERVICE

CORD SELECTION TABLE

Catalog Number	Trade Size	Cable Range		Color	For Types S, SO, ST & STO	For Types SJ, STO, SJT SJTO, SVO and Bus Drop
		Min.	Max.			
CG-50-A250	1/2"	.150	.250	RED		SVO: 18-2,3
CG-50-A350	1/2"	.250	.350	WHITE		SJT: 18-2,3 SJO: 18-2,3,4 16-2,3
CG-50-A450	1/2"	.350	.450	BLUE	18-2,3,4 16-2,3,4	SJO: 16-4, 14-2,3,4 12-2 BUS DROP: 14-3
CG-50-A560	1/2"	.450	.560	GREEN	18-5,6,7 16-4,5,6 14-2,3	SJO: 12-3 BUS DROP: 12-3 10-3
CG-50-A650	1/2"	.550	.650	BROWN	18-8,10 16-7,8 14-4 12-2,3 10-2	
CG-75-A250	3/4"	.150	.250	RED		SVO: 18-2,3
CG-75-A350	3/4"	.250	.350	WHITE		SJT: 18-2,3 SJO: 18-2,3,4 16-2,3
CG-75-A450	3/4"	.350	.450	BLUE	18-2,3,4 16-2,3,4	SJO: 16-4, 14-2,3,4 12-2 BUS DROP: 14-3
CG-75-A560	3/4"	.450	.560	GREEN	18-5,6,7 16-4,5,6 14-2,3	SJO: 12-3 BUS DROP: 12-3 10-3
CG-75-A650	3/4"	.550	.650	BROWN	18-8,10 16-7,8 14-4 12-2,3 10-2	
CG-75-B750	3/4"	.650	.750	YELLOW	18-12,14 16-10,12 14-5,6,7 12-4,5 10-3,4 8-2	BUS DROP: 8-3
CG-75-B850	3/4"	.750	.850	PURPLE	18-16,18,20 16-14,16,18 14-8 12-6,7,8 10-5 8-3,4 6-2	BUS DROP: 6-3
CG-100-B560	1"	.450	.560	GREEN	18-5,6,7 16-4,5,6 14-2,3	SJO: 12-3 BUS DROP: 12-3 10-3
CG-100-B650	1"	.550	.650	BROWN	18-8,10 16-7,8 14-4 12-2,3 10-2	
CG-100-B750	1"	.650	.750	YELLOW	18-12,14 16-10,12 14-5,6,7 12-4,5 10-3,4 8-2	BUS DROP: 8-3
CG-100-B850	1"	.750	.850	PURPLE	18-16,18,20 16-14,16,18 14-8 12-6,7,8 10-5 8-3,4 6-2	BUS DROP: 6-3
CG-100-C950	1"	.850	.950	GRAY	18-22,24,26 16-20,22,24 14-10,12 10-6,7,8 6-3,4	BUS DROP: 4-3
CG-100-C1050	1"	.950	1.050	BLACK	18-30 16-26 14-14,16 12-10 4-3	
CG-125-C850	1 1/4"	.750	.850	PURPLE	18-16,18,20 16-14,16,18 14-8 12-6,7,8 10-5 8-3,4 6-2	BUS DROP: 6-3
CG-125-C950	1 1/4"	.850	.950	GRAY	18-22,24,26 16-20,22,24 14-10,12 10-6,7,8 6-3,4	BUS DROP: 4-3
CG-125-D1050	1 1/4"	.950	1.050	BLACK	18-30 16-26 14-14,16 12-10 4-3	
CG-125-D1150	1 1/4"	1.050	1.150	ORANGE	18-36,40 16-30,36 14-18,20 12-12,14 10-10 4-4	BUS DROP: 2-3
CG-125-D1250	1 1/4"	1.150	1.250	RED	16-40 14-22 12-16,18 10-12,14 2-3	
CG-125-D1375	1 1/4"	1.250	1.375	WHITE	14-24,26 12-20 10-16 2-4	
CG-150-D1050	1 1/2"	.950	1.050	BLACK	18-30 16-26 14-14,16 12-10 4-3	
CG-150-D1150	1 1/2"	1.050	1.150	ORANGE	18-36,40 16-30,36 14-18,20 12-12,14 10-10 4-4	BUS DROP: 2-3
CG-150-D1250	1 1/2"	1.150	1.250	RED	16-40 14-22 12-16,18 10-12,14 2-3	
CG-150-D1375	1 1/2"	1.250	1.375	WHITE	14-24,26 12-20 10-16 2-4	



PVC FITTINGS

ELBOWS
EXPANSION JOINTS
ENTRANCE HEADS
CONDUIT BODIES
ADAPTERS
COUPLINGS
MOLDED REDUCERS
MOLDED END BELLS
END CAPS
CONDUIT BOXES
JUNCTION BOXES
DUPLEX BOXES & COVERS
TWO HOLE PIPE STRAPS
PLOY PLUGS
CONDUIT CEMENT & PRIMER



V90-S-50

PVC 90° STANDARD RADIUS ELBOWS

Use to change the direction of a conduit run by 90° degrees

Features: Indoor/outdoor use, suitable for aboveground or buried

Material: Schedule 40 PVC

Certifications: cULus



Catalog Number	Trade Size	Standard Pkg.	Catalog Number	Trade Size	Standard Pkg.
V90-S-50	1/2"	50	V90-S-250	2 1/2"	1
V90-S-75	3/4"	35	V90-S-300	3"	1
V90-S-100	1"	20	V90-S-350	3 1/2"	1
V90-S-125	1 1/4"	30	V90-S-400	4"	1
V90-S-150	1 1/2"	30	V90-S-500	5"	1
V90-S-200	2"	15	V90-S-600	6"	1

PVC 45° STANDARD RADIUS ELBOWS

Use to change the direction of a conduit run by 45° degrees

Features: Indoor/outdoor use, suitable for aboveground or buried

Material: Schedule 40 PVC

Certifications: cULus



Catalog Number	Trade Size	Standard Pkg.	Catalog Number	Trade Size	Standard Pkg.
V45-S-50	1/2"	50	V45-S-250	2 1/2"	1
V45-S-75	3/4"	25	V45-S-300	3"	1
V45-S-100	1"	20	V45-S-350	3 1/2"	1
V45-S-125	1 1/4"	25	V45-S-400	4"	1
V45-S-150	1 1/2"	20	V45-S-500	5"	1
V45-S-200	2"	10	V45-S-600	6"	1

PVC EXPANSION JOINTS

Allows for expansion and contraction in PVC conduit runs

Features: Watertight Seal

Material: PVC

Certifications: cULus



Catalog Number	Trade Size	Standard Pkg.	Catalog Number	Trade Size	Standard Pkg.
VEJ-50	1/2"	25	VEJ-250	2 1/2"	12
VEJ-75	3/4"	10	VEJ-300	3"	12
VEJ-100	1"	10	VEJ-350	3 1/2"	9
VEJ-125	1 1/4"	5	VEJ-400	4"	6
VEJ-150	1 1/2"	5	VEJ-500	5"	1
VEJ-200	2"	25	VEJ-600	6"	1

PVC MAST ENTRANCE HEADS

Install on a vertical conduit to receive open wires from an electrical service line

Features: Weather resistant

Material: PVC

Certifications: cULus



Catalog Number	Trade Size	Standard Pkg.
VMH-125	1 1/4"	20
VMH-150	1 1/2"	20
VMH-200	2"	5
VMH-250	2 1/2"	5
VMH-300	3"	5
VMH-350	3 1/2"	5
VMH-400	4"	1

PVC SERVICE CABLE CAPS

Use as a connecting point in an overhead service entrance for SEU cable

Features: Snap-on cover

Material: PVC

Certifications: cULus

Catalog Number	Trade Size	Standard Pkg.
4P	3 No. 8-6-4-2	50
4XL	3 No. 3/0-4/0	10



PVC TYPE C CONDUIT BODIES

Use as a connector in straight line installations that allow access for wire pulling

Features: Rectangular shaped conduit body with a removable cover

Material: PVC

Certifications: cULus



Catalog Number	Trade Size	Standard Pkg.	Catalog Number	Trade Size	Standard Pkg.
VC-50	1/2"	25	VC-200	2"	5
VC-75	3/4"	15	VC-250	2 1/2"	5
VC-100	1"	10	VC-300	3"	5
VC-125	1 1/4"	10	VC-350	3 1/2"	4
VC-150	1 1/2"	10	VC-400	4"	4

PVC TYPE LB CONDUIT BODIES

Use for a change of direction of the conduit run with the back hub usually exiting through a wall

Features: Rectangular shaped conduit body with a removable cover

Material: PVC

Certifications: cULus



Catalog Number	Trade Size	Standard Pkg.	Catalog Number	Trade Size	Standard Pkg.
VLB-50	1/2"	25	VLB-200	2"	5
VLB-75	3/4"	15	VLB-250	2 1/2"	5
VLB-100	1"	10	VLB-300	3"	5
VLB-125	1 1/4"	10	VLB-350	3 1/2"	4
VLB-150	1 1/2"	10	VLB-400	4"	4

PVC TYPE LL CONDUIT BODIES

Use for a 90° change of direction of the conduit run

Features: Rectangular shaped conduit body with a removable cover

Material: PVC

Certifications: cULus



Catalog Number	Trade Size	Standard Pkg.	Catalog Number	Trade Size	Standard Pkg.
VLL-50	1/2"	25	VLL-200	2"	5
VLL-75	3/4"	15	VLL-250	2 1/2"	5
VLL-100	1"	10	VLL-300	3"	5
VLL-125	1 1/4"	10	VLL-350	3 1/2"	4
VLL-150	1 1/2"	10	VLL-400	4"	4

PVC TYPE LR CONDUIT BODIES

Use for a 90° change of direction of the conduit run

Features: Rectangular shaped conduit body with a removable cover

Material: PVC

Certifications: cULus



Catalog Number	Trade Size	Standard Pkg.	Catalog Number	Trade Size	Standard Pkg.
VLR-50	1/2"	25	VLR-200	2"	5
VLR-75	3/4"	15	VLR-250	2 1/2"	5
VLR-100	1"	10	VLR-300	3"	5
VLR-125	1 1/4"	10	VLR-350	3 1/2"	4
VLR-150	1 1/2"	10	VLR-400	4"	4

PVC TYPE T CONDUIT BODIES

Allows 3-way inline access in conduit systems

Features: Rectangular shaped conduit body with a removable cover

Material: PVC

Certifications: cULus



Catalog Number	Trade Size	Standard Pkg.	Catalog Number	Trade Size	Standard Pkg.
VT-50	1/2"	25	VT-200	2"	5
VT-75	3/4"	15	VT-250	2 1/2"	2
VT-100	1"	10	VT-300	3"	2
VT-125	1 1/4"	10	VT-350	3 1/2"	1
VT-150	1 1/2"	10	VT-400	4"	1

PVC TERMINAL MALE ADAPTERS

Connects PVC conduit to a threaded PVC or steel conduit bell or terminate raceway to a box or enclosure

Features: Fitting consists of one solvent female end and one threaded male end

Material: PVC

Certifications: cULus



Catalog Number	Trade Size	Standard Pkg.	Catalog Number	Trade Size	Standard Pkg.
VTA-50	1/2"	200	VTA-250	2 1/2"	20
VTA-75	3/4"	125	VTA-300	3"	40
VTA-100	1"	70	VTA-350	3 1/2"	30
VTA-125	1 1/4"	40	VTA-400	4"	20
VTA-150	1 1/2"	30	VTA-500	5"	10
VTA-200	2"	40	VTA-600	6"	8

PVC FEMALE ADAPTERS

A connector used to transition threaded metal conduit to PVC conduit

Features: Fitting consists of two female ends, one is threaded and the other is solvent weld

Material: PVC

Certifications: cULus



Catalog Number	Trade Size	Standard Pkg.	Catalog Number	Trade Size	Standard Pkg.
VFA-50	1/2"	200	VFA-250	2 1/2"	20
VFA-75	3/4"	125	VFA-300	3"	40
VFA-100	1"	70	VFA-350	3 1/2"	30
VFA-125	1 1/4"	40	VFA-400	4"	20
VFA-150	1 1/2"	30	VFA-500	5"	10
VFA-200	2"	40	VFA-600	6"	8

PVC JUNCTION BOX ADAPTERS

For use with hub inside box or enclosure

Features: Solvent welded connection for a watertight fit

Material: PVC

Certifications: cULus



Catalog Number	Trade Size	Standard Pkg.	Catalog Number	Trade Size	Standard Pkg.
VBA-50	1/2"	100	VBA-200	2"	25
VBA-75	3/4"	100	VBA-250	2 1/2"	10
VBA-100	1"	100	VBA-300	3"	10
VBA-125	1 1/4"	50	VBA-350	3 1/2"	10
VBA-150	1 1/2"	50	VBA-400	4"	10

PVC COUPLINGS

Connects two lengths of PVC conduit

Features: Fitting consists of two female ends and a center stop

Material: PVC

Certifications: cULus



Catalog Number	Trade Size	Standard Pkg.	Catalog Number	Trade Size	Standard Pkg.
VCPL-50	1/2"	200	VCPL-250	2 1/2"	20
VCPL-75	3/4"	125	VCPL-300	3"	40
VCPL-100	1"	70	VCPL-350	3 1/2"	30
VCPL-125	1 1/4"	40	VCPL-400	4"	20
VCPL-150	1 1/2"	30	VCPL-500	5"	10
VCPL-200	2"	40	VCPL-600	6"	8

PVC MOLDED REDUCERS

Bushing designed to fit into a bell end or female fitting to reduce knockout diameter

Features: All connections are solvent weld

Material: PVC

Certifications: cULus



Catalog Number	Trade Size	Standard Pkg.	Catalog Number	Trade Size	Standard Pkg.
VMR-61	3/4" x 1/2"	100	VMR-81	2 1/2" x 2"	25
VMR-63	1" x 3/4"	100	VMR-88	3" x 2 1/2"	25
VMR-66	1 1/4" x 1"	50	VMR-404	4" x 3"	20
VMR-70	1 1/2" x 1 1/4"	50	VMR-405	4" x 3 1/2"	20
VMR-75	2" x 1 1/2"	25			

PVC MOLDED END BELLS

Use in concrete vault walls to provide a smooth, safe entrance to conduit outside

Features: Protects wiring being pulled through the vault wall

Material: PVC

Certifications: cULus



Catalog Number	Trade Size	Standard Pkg.	Catalog Number	Trade Size	Standard Pkg.
VEB-50	1/2"	100	VEB-250	2 1/2"	30
VEB-75	3/4"	100	VEB-300	3"	50
VEB-100	1"	50	VEB-350	3 1/2"	50
VEB-125	1 1/4"	50	VEB-400	4"	50
VEB-150	1 1/2"	50	VEB-500	5"	25
VEB-200	2"	40	VEB-600	6"	15

PVC END CAPS

Caps off pipe openings, allows access for future expansion or service

Features: Easy to install slip fit

Material: PVC

Certifications: cULus



Catalog Number	Trade Size	Standard Pkg.	Catalog Number	Trade Size	Standard Pkg.
VEC-50	1/2"	50	VEC-200	2"	50
VEC-75	3/4"	50	VEC-250	2 1/2"	50
VEC-100	1"	50	VEC-300	3"	50
VEC-125	1 1/4"	40	VEC-350	3 1/2"	25
VEC-150	1 1/2"	30	VEC-400	4"	25

PVC ELECTRICAL CONDUIT BOXES - TYPE FSE

Intended for conduit termination with one conduit hub and no outlet

Features: For indoor and outdoor locations where boxes are exposed and subject to environmental conditions

Material: PVC

Certifications: cULus



Catalog Number	Trade Size	Standard Pkg.
VFS-50	1/2"	10
VFS-75	3/4"	10
VFS-100	1"	10

PVC ELECTRICAL CONDUIT BOXES - TYPE FSC

Intended for straight line conduit runs with one hub on each of the short walls of the box

Features: For indoor and outdoor locations where boxes are exposed and subject to environmental conditions

Material: PVC

Certifications: cULus



Catalog Number	Trade Size	Standard Pkg.
VFSC-50	1/2"	10
VFSC-75	3/4"	10
VFSC-100	1"	10

PVC ELECTRICAL CONDUIT BOXES - TYPE FSCC

Intended for straight line conduit runs with two conduit hubs on one end and the conduit hub on the opposite side

Features: For indoor and outdoor locations where boxes are exposed and subject to environmental conditions

Material: PVC

Certifications: cULus



Catalog Number	Trade Size	Standard Pkg.
VFSCC-50	1/2"	10
VFSCC-75	3/4"	10
VFSCC-100	1"	10

PVC ELECTRICAL CONDUIT BOXES - TYPE FSS

Intended for conduit termination with two conduit hubs on one end and no outlet

Features: For indoor and outdoor locations where boxes are exposed and subject to environmental conditions

Material: PVC

Certifications: cULus



Catalog Number	Trade Size	Standard Pkg.
VFSS-50	1/2"	10
VFSS-75	3/4"	10
VFSS-100	1"	10

PVC ELECTRICAL CONDUIT BOXES - TYPE FDB

Designed to allow for a hub opening to be cut into the box depending on application

Features: For indoor and outdoor locations where boxes are exposed and subject to environmental conditions

Material: PVC

Certifications: cULus



Catalog Number	Trade Size	Standard Pkg.
VFD	-	10

PVC JUNCTION BOXES

Designed to support electrical devices and fixtures

Features: Enclosure allows multiple conduits to be connected and wire splice made within

Material: PVC

Certifications: cULus



Catalog Number	Trade Size	Standard Pkg.	Catalog Number	Trade Size	Standard Pkg.
VJB-442	4" x 4" x 2"	10	VJB-886	8" x 8" x 6"	4
VJB-444	4" x 4" x 4"	10	VJB-887	8" x 8" x 7"	4
VJB-664	6" x 6" x 4"	10	VJB-12124	12" x 12" x 4"	2
VJB-666	6" x 6" x 6"	5	VJB-12126	12" x 12" x 6"	2
VJB-884	8" x 8" x 4"	5			

PVC BLANK COVERS

Covers wiring devices inside box after installation

Features: Includes gasket and screws

Material: PVC

Certifications: cULus



Catalog Number	Trade Size	Standard Pkg.
VBC	-	50

PVC TWO HOLE PIPE STRAPS

Conduit support device used to anchor conduit to interior or exterior surfaces

Features: Two hole construction enables greater load bearing capacity

Material: PVC

Certifications: cULus



Catalog Number	Trade Size	Standard Pkg.	Catalog Number	Trade Size	Standard Pkg.
VTH-50	1/2"	300	VTH-200	2"	200
VTH-75	3/4"	200	VTH-250	2 1/2"	100
VTH-100	1"	200	VTH-300	3"	100
VTH-125	1 1/4"	200	VTH-400	4"	100
VTH-150	1 1/2"	200			

PVC FLOOR BOX BASE

Designed to be embedded in concrete floor giving access to power and data lines

Features: PVC molded parts and reducer plugs included

Material: PVC

Certifications: cULus



Catalog Number	Description	Standard Pkg.
VFB	Floor Box w/temporary protective cap	9

PVC FLOOR BOX DUPLEX RECEPTACLE COVER

Bronze color PVC cover with duplex cut out

Features: Includes corrosion resistant hardware

Material: PVC

Certifications: cULus



Catalog Number	Description	Standard Pkg.
VFBDRC	Floor Box Cover Bronze color	9

PVC CONDUIT SOLVENT CEMENT

For use on duct and conduit PVC pipe

Features: Medium body, medium set clear cement

Certifications: cULus



Catalog Number	Size	Standard Pkg.
VCEM-1/2PT	1/2 Pint	24
VCEM-PT	1 Pint	24
VCEM-QT	1 Quart	12

CLEAR PRIMER FOR PVC CEMENT

Removes dirt, oils and other contaminants from the surface of PVC pipe

Features: Multi-purpose

Certifications: cULus



Catalog Number	Size	Standard Pkg.
VPRIM-PT	1 Pint	24

WEATHERPROOF PRODUCTS

PAR LAMPHOLDER
CLOSURE PLUGS
BOXES
COVERS
OUTLET COVERS



PT-11

VISIT
WWW.PECO-ELECTRIC.COM
FOR MORE

WEATHERPROOF LAMP HOLDERS

Suitable for wet locations

Features: Available in gray or white with powder coat finish

Material: Aluminum

Certifications: cULus



Catalog Number	Description	Standard Pkg.
PAR-1	Gray	50
PAR-1W	White	50

CLOSURE PLUGS

To safely seal unused hubs in metallic outlet boxes

Features: UL listed for wet locations

Material: Zinc

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
P-1	1/2" Gray	100	1,000
P-1W	1/2" White	100	1,000
P-2	3/4" Gray	50	500
P-2W	3/4" White	50	500
P-3	1" Gray	50	500
P-3W	1" White	50	500

SINGLE GANG WEATHERPROOF BOXES

For wall or pole mounting of outdoor outlets, switches, or floodlights

Features: Boxes include closure plugs, grounding screws, and mounting lug hardware

Material: Aluminum

Certifications: cULus



Catalog Number	Hub Size	No. Outlets	Color	Unit Pkg.	Standard Pkg.	Catalog Number	Hub Size	No. Outlets	Color	Unit Pkg.	Standard Pkg.
PL-11	1/2"	3	Gray	10	50	PL-14W	3/4"	3	White	10	50
PL-11W	1/2"	3	White	10	50	PL-14-2	3/4"	4	Gray	10	50
PL-11-2	1/2"	4	Gray	10	50	PL-14-2W	3/4"	4	White	10	50
PL-11-2W	1/2"	4	White	10	50	PL-14-22	3/4"	5	Gray	10	50
PL-11-22	1/2"	5	Gray	10	50	PL-14-22W	3/4"	5	White	10	50
PL-11-22W	1/2"	5	White	10	50	PL-15	1"	3	Gray	10	50
PL-14	3/4"	3	Gray	10	50	PL-15-22	1"	5	Gray	10	50

DOUBLE GANG WEATHERPROOF BOXES

For wall or pole mounting of outdoor outlets, switches, or floodlights

Features: Boxes include closure plugs, grounding screws, and mounting lug hardware

Material: Aluminum

Certifications: cULus



Catalog Number	Hub Size	No. Outlets	Color	Unit Pkg.	Standard Pkg.	Catalog Number	Hub Size	No. Outlets	Color	Unit Pkg.	Standard Pkg.
PT-11	1/2"	3	Gray	10	40	PT-14W	3/4"	3	White	10	40
PT-11W	1/2"	3	White	10	40	PT-14-22	3/4"	4	Gray	10	40
PT-11-22	1/2"	4	Gray	10	40	PT-14-22W	3/4"	4	White	10	40
PT-11-22W	1/2"	4	White	10	40	PT-15	1"	3	Gray	10	40
PT-14	3/4"	5	Gray	10	40	PT-15-22	1"	5	Gray	10	40

4" ROUND WEATHERPROOF BOXES

For use with all round outlet box and outlet covers

Features: For wall or ceiling mounting

Material: Aluminum

Certifications: cULus



Catalog Number	Hub Size	No. Outlets	Color	Unit Pkg.	Standard Pkg.
PR11-4	1/2"	5	Gray	10	40
PR11-4W	1/2"	5	White	10	40
PR14-4	3/4"	5	Gray	10	40
PR14-4W	3/4"	5	White	10	40

BLANK WEATHERPROOF COVERS

For use with single or double gang outdoor boxes

Features: Weather seal gasket to block moisture

Material: Aluminum

Certifications: cULus



Catalog Number	Type	Color	Unit Pkg.	Standard Pkg.
PC-0	Single	Gray	20	100
PC-0W	Single	White	20	100
PC-02	Double	Gray	10	50
PC-02W	Double	White	10	50

4" ROUND WEATHERPROOF COVERS

For use with round outdoor device box

Features: Weather seal gasket to block moisture

Material: Aluminum

Certifications: cULus



Catalog Number	Hub Size	No. Outlets	Color	Unit Pkg.	Standard Pkg.
PR-1	1/2"	1	Gray	10	50
PR-1W	1/2"	1	White	10	50
PR-2	1/2"	2	Gray	10	50
PR-2W	1/2"	2	White	10	50
PR-3	1/2"	3	Gray	10	50
PR-3W	1/2"	3	White	10	50

G.F.I. WEATHERPROOF COVERS

For use with single gang outdoor box

Features: Aluminum die-cast cover with a spring loaded lid

Material: Aluminum

Certifications: cULus



Catalog Number	Hub Size	Orientation	Color	Unit Pkg.	Standard Pkg.
FG-1DC	Single	Horizontal	Gray	5	50
FG-1DCW	Single	Horizontal	White	5	50

POWER OUTLET WEATHERPROOF COVERS

For use with single or double gang outdoor box

Features: Aluminum die-cast cover with a spring loaded lid

Material: Aluminum

Certifications: cULus



Catalog Number	Size	Orientation	Ampere	Unit Pkg.	Standard Pkg.
PO-50	Single	Vertical	30-50	10	50
TPO-50V	Double	-	20-30-50	10	50

SINGLE RECEPTACLE WEATHERPROOF COVERS

For use with 1.406 diameter receptacle in a single outlet box

Features: Aluminum die-cast cover with a spring loaded lid

Material: Aluminum

Certifications: cULus



Catalog Number	Size	Orientation	Color	Unit Pkg.	Standard Pkg.
PC-71	Single	Vertical	Gray	10	50
PC-71W	Single	Vertical	White	10	50

SINGLE GANG DUPLEX RECEPTACLE WEATHERPROOF COVERS

Will fit all duplex receptacles in single outlet boxes

Features: Aluminum die-cast cover with a spring loaded lid

Material: Aluminum

Certifications: cULus



Catalog Number	Size	Orientation	Color	Unit Pkg.	Standard Pkg.
PC-81	Single	Horizontal	Gray	10	50
PC-81W	Single	Horizontal	White	10	50

DOUBLE GANG DUPLEX RECEPTACLE WEATHERPROOF COVERS

For use with double gang outdoor device box

Features: Aluminum die-cast cover with a spring loaded lid

Material: Aluminum

Certifications: cULus



Catalog Number	Size	Color	Unit Pkg.	Standard Pkg.
PC-271	Double	Gray	10	50
PC-271W	Double	White	10	50

DOUBLE GANG DUAL DUPLEX WEATHERPROOF COVERS

For use with double gang outdoor device box

Features: Aluminum die-cast cover with a spring loaded lid

Material: Aluminum

Certifications: cULus



Catalog Number	Size	Color	Unit Pkg.	Standard Pkg.
PC-261	Double	Gray	10	50
PC-261W	Double	White	10	50

RECTANGULAR WEATHERPROOF COVERS

Fits FS device boxes and listed for wet locations

Features: Available with 1, 2 or 3 hole configurations

Material: Aluminum

Certifications: cULus



Catalog Number	Hub Size	No. Outlets	Color	Unit Pkg.	Standard Pkg.
PC-1	1/2"	1	Gray	10	50
PC-1W	1/2"	1	White	10	50
PC-2	1/2"	2	Gray	10	50
PC-2W	1/2"	2	White	10	50
PC-3	1/2"	3	Gray	10	50
PC-3W	1/2"	3	White	10	50

SERVICE ENTRANCE

ENTRANCE HEADS

MAST KITS

ENTRANCE ELLS - SLB

WATERTIGHT CONNECTORS

UF CONNECTORS

STRAPS

ROOF FLASHING



705

CLAMP ON ENTRANCE HEADS

Provides water resistant cap to protect service entrance cables

Features: Mounts on top of Rigid/IMC conduit
Material: Aluminum
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
700	1/2"	10	50	705	2"	-	5
701	3/4"	10	50	706	2 1/2"	-	2
702	1"	5	25	707	3"	-	2
703	1 1/4"	5	25	708	3 1/2"	-	1
704	1 1/2"	-	10	709	4"	-	1

THREADED SERVICE ENTRANCE HEADS

Provides water resistant cap to protect service entrance cables

Features: Mounts on top of Rigid/IMC conduit
Material: Aluminum
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
26	1/2"	10	50	32	2 1/2"	-	2
27	3/4"	10	50	33	3"	-	1
28	1"	10	50	34	3 1/2"	-	1
29	1 1/4"	5	25	35	4"	-	1
30	1 1/2"	-	10	36	5"	-	1
31	2"	-	5	37	6"	-	1

MAST ENTRANCE HEADS

Caps overhead service entrance

Features: Eliminates sharp edges to protect wire
Material: Aluminum
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
712	2" X 1 1/4"	10	80
713	2" X 1 1/2"	10	80
715	2 1/2" X 1 1/4"	5	80
717	2" X 2"	5	180

SERVICE CABLE CAPS

Caps overhead services that utilize SEU cable

Features: Provides water resistant cap when mounted on conduit
Material: Aluminum
Certifications: cULus



Catalog Number	Cable Size	Standard Pkg.
4L	3 #8 to 3 #1	50
4XL-AL	1/0 - 4/0	10

ENTRANCE ELLS (SLB)

Enables effortless wire pulling when raceway alters direction

Features: Allows access for inspection, pulling and maintenance
Material: Aluminum
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
730	1/2"	10	50	734	1 1/2"	-	10
731	3/4"	10	50	735	2"	-	10
732	1"	5	25	733-XL	1 1/4"	-	10
733	1 1/4"	-	10	735-XL	2"	-	10

SERVICE ENTRANCE MAST KITS

Provides an assortment of SE mast components for the installation of overhead service drops

Features: Kits eliminate the need to purchase and stock additional components
Certifications: cULus



Catalog Number	Kit Contents	Standard Pkg.
MK-200	1 - 2" Clamp-on entrance head 1 - Roof flange & neoprene seal 1 - Pipe mounting wireholder 2 - 2" Two hole pipe straps	1
MK-250	1 - 2 1/2" Clamp-on entrance head 1 - Roof flange & neoprene seal 1 - Pipe mounting wireholder 2 - 2 1/2" Two hole pipe straps	1

ROOF FLASHING

Watertight protection for service entrance conduit or ventilation pipes

Features: Strong galvanized steel with neoprene seal
Material: Steel/Neoprene
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
RF2	2"	25	250
RF25	2 1/2"	25	250

ROMEX AND SEU STRAPS

Supports service entrance cable, types SE & SEU to mounting surface

Features: Heavy gauge steel for extra strength
Material: Steel
Certifications: cULus



Catalog Number	Cable Size	Unit Pkg.	Standard Pkg.
188A	14-2, 12-2	200	2,000
188B	14-3, 12-3	200	2,000

UF CONNECTORS

Use to secure SE/SEU cable to a metal enclosure

Features: For underground feeder cable
Material: Zinc
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
UF-50	1/2"	25	250
UF-75	3/4"	25	250

INSTALLATION SUPPORTS

CONDUIT HANGERS

BEAM CLAMPS

CEILING BOX SUPPORTS

SWITCH BOX SUPPORTS

ADJUSTABLE PIPE
WIREHOLDERS

PIPE WIREHOLDERS

PORCELAIN WIREHOLDERS

PORCELAIN SPLIT
INSULATORS



H50WB

INSTALLATION SUPPORTS

CONDUIT HANGERS

Secures EMT or Rigid conduit to threaded rod, insulator supports, or mounting surface

Features: Assembled with nut and bolt
Material: Steel
Certifications: cULus



Catalog Number	Rigid	EMT	Unit Pkg.	Standard Pkg.	Catalog Number	Rigid	EMT	Unit Pkg.	Standard Pkg.
H50WB	1/2"	1/2"	100	500	H200WB	2"	2"	-	50
H75WB	3/4"	3/4"	-	100	H250WB	2 1/2"	2 1/2"	-	50
H100WB	1"	1"	-	100	H300WB	3"	3"	-	50
H125AWB	-	1 1/4"	-	100	H350WB	3 1/2"	3 1/2"	-	25
H125WB	1 1/4"	1 1/2"	-	100	H400WB	4"	4"	-	25
H150WB	1 1/2"	-	-	100					

BEAM CLAMPS MALLEABLE IRON

Supports threaded rod, threaded bridle rings and electrical boxes

Features: Body will not distort or slip when tightened
Material: Malleable Iron
Certifications: cULus



Catalog Number	Trade Size	Tap Size	Standard Pkg.
902	3/4"	1/4-20	100
903	3/4"	3/8-16	100

BEAM CLAMPS - STEEL

Supports threaded rod, threaded bridle rings and electrical boxes

Features: Single screw, 2 hole assembly
Material: Steel
Certifications: cULus



Catalog Number	Trade Size	Tap Size	Standard Pkg.
902S	3/4"	1/4-20	100
904S	3/4"	3/8-16	100

CEILING BOX SUPPORTS

Use for box installations where space and access may be limited

Features: Steel bars ensure performance and longevity
Material: Steel
Certifications: cULus



Catalog Number	Trade Size	Standard Pkg.
CBS	1" to 2"	50

SWITCH BOX SUPPORTS

Use to support switch box in wallboard

Features: Installed in pairs
Material: Steel
Certifications: cULus



Catalog Number	Unit Pkg.	Standard Pkg.
150	50	500

ADJUSTABLE PIPE WIREHOLDERS

Protects sheathing and ensures performance

Features: Corrosion resistant for secure installation
Material: Porcelain/Steel
Certifications: cULus



Catalog Number	Trade Size	Porcelain Opening	Standard Pkg.
AWH-300	1 1/4" - 3"	7/8" - 1"	20

PORCELAIN WIREHOLDERS

Secures wires before entry into a mast or SE cap

Features: Includes lag bolt
Material: Porcelain/Steel
Certifications: cULus



Catalog Number	Trade Size	Porcelain Opening	Standard Pkg.
B63-C	2"	7/8" - 1"	25
B73-C	2 1/2"	7/8" - 1"	10

PIPE MOUNTING WIREHOLDERS

Secures wires before entry into a mast or SE cap

Features: Protects sheathing
Material: Porcelain/Steel
Certifications: cULus



Catalog Number	Trade Size	Porcelain Opening	Standard Pkg.
B3625	1/4" x 2"	3/8" - 1/2"	100
B3627	3/8" x 2 1/2"	7/8" - 1"	50

PORCELAIN SPLIT INSULATOR

Utilized for enhanced power transmission

Features: Highest quality electrical grade material
Material: Porcelain
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
SI-100	1"	10	100

GROUNDING

GROUND CLAMPS

CONDUIT HUBS &
ROD CLAMPS

LUGS

TERMINAL LUGS

GREEN PIGTAILS

SPLIT BOLT CONNECTORS



12C

GROUND CLAMPS BARE WIRE - BRONZE

Use to ground bare wire to galvanized steel pipes or copper tubing

Features: Rotational movement of clamps permit fast approval when required

Material: Bronze

Certifications: cULus

* Brass screws



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
19B	1/2" to 1"	25	250
+B19B	1/2" to 1"	25	250
59B	1 1/4" to 2"	-	50
+B59B	1 1/4" to 2"	-	50
56B	2 1/2" to 4"	-	10
+B56B	2 1/2" to 4"	-	10
57B	4" to 6"	-	5

GROUND CLAMPS BARE WIRE - ZINC

Use to ground bare wire to galvanized steel pipes or copper tubing

Features: Rotational movement of clamps permit fast approval when required

Material: Zinc

Certifications: cULus

* Brass finish

** Bright zinc finish



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
+19BZ	1/2" to 1"	25	250
**19Z	1/2" to 1"	25	250

GROUND CLAMPS ARMORED CABLE - BRONZE

Use to ground armored cable to galvanized steel pipes or copper tubing

Features: Structural clamp securely holds armor

Material: Bronze

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
39B	1/2" to 1"	25	250
49B	1 1/4" to 2"	-	50

REBAR GROUND CLAMPS

For securing bare copper ground to rebar

Features: Bronze with stainless steel screws

Material: Bronze

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
369D	3/8" to 1"	25	100

GROUND CLAMPS W/HUB FOR RIGID CONDUIT BRONZE

Use to ground bare copper wire to galvanized steel water pipes, ground rods or other structural members

Features: Assemble with threaded hub for use on rigid conduit pipe

Material: Bronze

Certifications: cULus

* Brass screws



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
7C	1/2" to 1" - 1/2" Hub	10	100	13C	1 1/4" to 2" - 3/4" Hub	10	50
+B7C	1/2" to 1" - 1/2" Hub	10	100	14C	2 1/2" to 4" - 3/4" Hub	-	10
9C	1 1/4" to 2" - 1/2" Hub	10	50	15C	4" to 6" - 3/4" Hub	-	5
10C	2 1/2" to 4" - 1/2" Hub	-	10	240	1/2" to 1" - 1" Hub	10	50
11C	4" to 6" - 1/2" Hub	-	5	241	1 1/4" to 2" - 1" Hub	-	25
12C	1/2" to 1" - 3/4" Hub	10	100	242	2 1/2" to 4" - 1" Hub	-	10
+B12C	1/2" to 1" - 3/4" Hub	10	100	243	4" to 6" - 1" Hub	-	10

GROUND HUBS - BRONZE

Use with grounding pipe clamps to connect rigid conduit to water pipes for grounding

Features: Assemble with threaded hub for use on rigid conduit pipe

Material: Bronze

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
875	1/2"	25	100
876	3/4"	25	100
877	1"	25	50

ROD CLAMPS - BRONZE

Securely connects a grounding connector to a drive

Features: Approved for direct burial in ground and concrete

Material: Bronze

Certifications: cULus

* Brass screw



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
52	1/2"	25	250
+52B	1/2"	25	250
53	5/8"	-	100
+53B	5/8"	-	100
+54B	3/4"	-	50

LAY-IN GROUNDING LUGS ALUMINUM

For use with aluminum or copper conductor

Features: Provides positive grounding points in load centers or enclosures

Material: Aluminum

Certifications: cULus



Catalog Number	Trade Size	Standard Pkg.
GL-144	14-4	100
GL-1410	14 1/0	100
GL-630	6-3/0	50
GL-6250	6-250MCM	50

SOLDERLESS CONNECTORS ALUMINUM

Terminates an electrical conductor to facilitate mechanical connection

Features: Two conductor design

Material: Aluminum

Certifications: cULus



Catalog Number	Wire Range	Unit Pkg.	Standard Pkg.
RA-6A	4-14	100	1,000
RA-2A	2-14	100	1,000
RA-0	1/0-14	50	500
RA-2/0	2/0-14	50	500

GROUNDING PIGTAIL

Use to ground receptacles to steel boxes

Features: Plated green to ensure proper identification

Material: Copper/Steel Screw

Certifications: cULus



Catalog Number	Description	Unit Pkg.	Standard Pkg.
GP	10-32 x 3/8" w/#12 wire	100	1,000

SPLIT BOLT SERVICE CONNECTORS

For copper to copper connections including copper weld wire

Features: Resistant to corrosion and cracking

Material: Bronze

Certifications: cULus



Catalog Number	Trade Size	Standard Pkg.	Catalog Number	Trade Size	Standard Pkg.
SB-10	16 Str. - 10 Str.	100	SB-2/0	2 Sol. - 2/0 Str.	25
SB-8	12 Sol. - 8 Str.	100	SB-3/0	2 Sol. - 3/0 Str.	25
SB-6	10 Sol. - 6 Str.	100	SB-4/0-250	1/0 Sol. - 250MCM	25
SB-4	8 Sol. - 4 Str.	100	SB-350	4/0 Sol. - 350MCM	12
SB-2	6 Sol. - 2 Str.	100	SB-500	250-500 MCM	12
SB-1/0	4 Sol. - 1/0 Str.	50			

SPLIT BOLT SERVICE CONNECTORS W/SPACER BAR

For copper to copper, copper to aluminum, aluminum to aluminum

Features: Electro tin-plated, high strength alloy with spacer

Material: Bronze

Certifications: cULus



Catalog Number	Trade Size	Standard Pkg.	Catalog Number	Trade Size	Standard Pkg.
SB-10-SP	16 Str. - 10 Str.	100	SB-2/0-SP	6 Str. - 2/0 Str.	25
SB-8-SP	16 Str. - 8 Str.	100	SB-3/0-SP	4 Str. - 3/0 Str.	25
SB-6-SP	14 Str. - 6 Sol.	100	SB-4/0-250-SP	4 Str. - 250MCM	25
SB-4-SP	10 Sol. - 4 Str.	100	SB-350-SP	3/0 Str. - 350MCM	12
SB-2-SP	8 Sol. - 2 Str.	100	SB-500-SP	3/0 Str. - 500MCM	12
SB-1/0-SP	6 Sol. - 1/0 Str.	50			

MISCELLANEOUS

KNOCKOUT SEALS

ANTI-SHORT BUSHINGS

DUCT-SEAL COMPOUND

**BLANK CEILING
OUTLET COVERS**

ROUND FLAT BOX COVERS



20

KNOCKOUT SEALS

Provides a safe barrier for the protection of exposed wires

Features: Easily installs into unused box knockouts

Material: Steel

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
20	1/2"	200	2,000
21	3/4"	100	1,000
22	1"	100	1,000
23	1 1/4"	50	500
24	1 1/2"	50	500
25	2"	25	250

ANTI-SHORT BUSHINGS

Inserted to protect conductors from the sharp edges of the raceway where cut

Features: Plastic construction compatible with AC and FMC

Material: Polyethylene

Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
383	0	14/2, 14/3, 12/2	100
384	1	14/4, 12/3, 6/1, 4/1	100
385	2	12/4, 10/2, 10,3, 2/1	100
386	3	10/4, 8/2, 8/3, 1/1	100
387	4	8/4, 6/2, 6/3, 6/4, 4/2, 4/3	100

DUCT-SEAL WEATHERPROOF COMPOUND

Use to seal around junction boxes, flashings, and service entrances

Features: Soft and non-toxic

Material: Non-drying synthetic polymer

Certifications: cULus



Catalog Number	Unit Pkg.	Standard Pkg.
DX-1	1	50
DX-5	1	10

CEILING BOX OUTLET COVER

To close an outlet box or mount a device

Features: Steel construction with white powder coat finish

Material: Steel

Certifications: cULus



Catalog Number	Trade Size	Standard Pkg.
CC-4W	4"	50

ROUND FLAT BOX COVER

Use to cover 4" round octagon boxes

Features: 1/2" knockout, galvanized

Material: Steel

Certifications: cULus



Catalog Number	Trade Size	Standard Pkg.
54C6	4"	100

Part No.	Page Number	Part No.	Page Number	Part No.	Page Number	Part No.	Page Number
4L	43	49M	29	181-S	9	262	5
4XL-AL	43	49M-A	29	182-S	9	263	5
4P	35	49B	47	183-S	9	264	5
4XL	35	52	47	184-S	9	265	5
6	30	52B	47	185-S	9	266	5
8	30	53	47	188A	43	267	5
7C	47	53B	47	188B	43	268	5
B7C	47	54B	47	199	19	269	5
9C	47	54C6	50	200	19	260ST	4
10C	47	56B	47	201	19	261ST	4
11C	47	B56B	47	202	19	262ST	4
12C	47	57B	47	203	19	263ST	4
B12C	47	59B	47	204	19	264ST	4
13C	47	B59B	47	205	19	265ST	4
14C	47	61ME	20	206	19	266ST	4
15C	47	63ME	20	207	19	267ST	4
19B	47	66ME	20	208	19	268ST	4
B19B	47	70ME	20	209	19	269ST	4
19BZ	47	74ME	20	210	19	260RST	4
19Z	47	75ME	20	212	19	261RST	4
20	50	105R	29	213	19	262RST	4
21	50	106R	29	201SL	19	263RST	4
22	50	107R	29	202SL	19	264RST	4
23	50	108R	29	203SL	19	265RST	4
24	50	109R	29	204SL	19	266RST	4
25	50	108	29	205SL	19	267RST	4
26	43	109	29	206SL	19	268RST	4
27	43	130	30	207SL	19	269RST	4
28	43	132	30	208SL	19	260BST	4
29	43	135	29	209SL	19	261BST	4
30	43	135-C	29	210SL	19	262BST	4
31	43	150	45	220	29	263BST	4
32	43	162	18	222	29	264BST	4
33	43	163	18	223	29	265BST	4
34	43	164	18	225	29	266BST	4
35	43	165	18	226	29	267BST	4
36	43	166	18	227	29	268BST	4
37	43	167	18	228	29	269BST	4
39B	47	168	18	220M	29	260RBST	4
40	29	169	18	222M	29	261RBST	4
41	29	170	18	223M	29	262RBST	4
42	29	171	18	225M	29	263RBST	4
43	29	160-S	18	226M	29	264RBST	4
44	29	161-S	18	227M	29	265RBST	4
45	29	162-S	18	228M	29	266RBST	4
46	29	163-S	18	229M	29	267RBST	4
40M	29	164-S	18	230M	29	268RBST	4
41M	29	165-S	18	231M	29	269RBST	4
42M	29	166-S	18	232M	29	260-90	5
43M	29	167-S	18	240	47	261-90	5
44M	29	168-S	9,18	241	47	282	18
45M	29	169-S	9,18	242	47	283	18
46M	29	170-S	9,18	243	47	284	18
47M	29	171-S	9,18	260	5	285	18
48M	29	180-S	9	261	5	286	18

Part No.	Page Number
287	18
288	18
289	18
290	18
291	18
300	5
301	5
302	5
303	5
304	5
305	5
306	5
307	5
308	5
309	5
300-OC	5
301-OC	5
302-OC	5
300ST	4
301ST	4
302ST	4
303ST	4
304ST	4
305ST	4
306ST	4
307ST	4
308ST	4
309ST	4
300BST	4
301BST	4
302BST	4
303BST	4
304BST	4
305BST	4
306BST	4
307BST	4
308BST	4
309BST	4
300-90	5
301-90	5
310	5
311	5
312	5
313	5
314	5
315	5
316	5
317	5
318	5
319	5
310ST	4
311ST	4
312ST	4
313ST	4
314ST	4

Part No.	Page Number
315ST	4
316ST	4
317ST	4
318ST	4
319ST	4
320	5
321	5
322	5
323	5
324	5
325	5
326	5
327	5
328	5
329	5
320ST	4
321ST	4
322ST	4
323ST	4
324ST	4
325ST	4
326ST	4
327ST	4
328ST	4
329ST	4
320RST	4
321RST	4
322RST	4
323RST	4
324RST	4
325RST	4
326RST	4
327RST	4
328RST	4
329RST	4
332	20
333	20
334	20
335	20
336	20
337	20
338	20
339	20
340	20
341	20
332M	20
333M	20
334M	20
335M	20
336M	20
337M	20
338M	20
339M	20
340M	20
341M	20

Part No.	Page Number
343M	20
344M	20
369D	47
370	16
371	16
372	16
373	16
374	16
375	16
376	16
377	16
378	16
379	16
381	16
382	16
375SPC	16
376SPC	16
377SPC	16
378SPC	16
379SPC	16
381SPC	16
382SPC	16
383	50
384	50
385	50
386	50
387	50
501	18
502	18
503	18
504	18
505	18
506	18
507	18
508	18
509	18
510	18
512	18
513	18
650	19
651	19
650EMT	6
651EMT	6
670	19
671	19
672	19
673	19
670EMT	6
671EMT	6
672EMT	6
680EMT	6
681EMT	6
685	5,30
686	5,30
687	5,30

Part No.	Page Number
700	43
701	43
702	43
703	43
704	43
705	43
706	43
707	43
708	43
709	43
712	43
713	43
715	43
717	43
730	43
731	43
732	43
733	43
734	43
735	43
733-XL	43
735-XL	43
780-DC	19
781-DC	19
800	20
801	20
802	20
803	20
830	20
831	20
832	20
833	20
834	20
835	20
836	20
837	20
850	20
851	20
852	20
853	20
854	20
855	20
875	47
876	47
877	47
902	45
903	45
902S	45
904S	45
938	30
960	15
961	15
962	15
963	15
964	15

Part No.	Page Number	Part No.	Page Number	Part No.	Page Number	Part No.	Page Number
965	15	1018C	20	CC-125A	11	CSR-250B	2
960MA	15	1019C	20	CC-150A	11	CSR-300B	2
961MA	15	AC-50	8,14	CC-200A	11	CSR-350B	2
962MA	15	AC-75	8,14	CC-250A	11	CSR-400B	2
963MA	15	AC-100	8,14	CC-300A	11	DX-1	50
964MA	15	AC-125	8,14	CC-350A	11	DX-5	50
965MA	15	AC-200	8,14	CC-400A	11	ELB-4550	9
966MA	15	AC-250	8,14	CC-4W	50	ELB-4575	9
967MA	15	AC-350	8,14	CG-50-A250	32	ELB-45100	9
968MA	15	AWH-300	45	CG-50-A350	32	ELB-45125	9
969MA	15	B63-C	45	CG-50-A450	32	ELB-45150	9
970MA	15	B73-C	45	CG-50-A560	32	ELB-45200	9
971MA	15	B3625	45	CG-50-A650	32	ELB-45250	9
972MA	15	B3627	45	CG-75-A250	32	ELB-45300	9
973MA	15	BX-50	30	CG-75-A350	32	ELB-45400	9
974MA	15	C-50A	11	CG-75-A450	32	ELB-9050	9
975MA	15	C-75A	11	CG-75-A560	32	ELB-9075	9
976MA	15	C-100A	11	CG-75-A650	32	ELB-90100	9
977MA	15	C-125A	11	CG-75-B750	32	ELB-90125	9
978MA	15	C-150A	11	CG-75-B850	32	ELB-90150	9
979MA	15	C-200A	11	CG-100-B560	32	ELB-90200	9
980	15	C-250A	11	CG-100-B650	32	ELB-90250	9
981	15	C-300A	11	CG-100-B750	32	ELB-90300	9
982	15	C-350A	11	CG-100-B850	32	ELB-90400	9
983	15	C-400A	11	CG-100-C950	32	EYA-50	24
984	15	C-50AE	6	CG-100-C1050	32	EYA-75	24
985	15	C-75AE	6	CG-125-C850	32	EYA-100	24
980MA	15	C-100AE	6	CG-125-C950	32	EYA-50A	24
981MA	15	C-125AE	6	CG-125-D1050	32	EYA-75A	24
982MA	15	C-150AE	6	CG-125-D1150	32	EYA-100A	24
983MA	15	C-200AE	6	CG-125-D1250	32	EYS-1	24
984MA	15	C-250AE	6	CG-125-D1375	32	EYS-2	24
985MA	15	C-300AE	6	CG-150-D1050	32	EYS-3	24
986MA	15	C-350AE	6	CG-150-D1150	32	EYSC-8	24
987MA	15	C-400AE	6	CG-150-D1250	32	EYSC-16	24
988MA	15	C-50CA	7,12	CG-150-D1375	32	EYSC-80	24
989MA	15	C-75CA	7,12	CS-150B	2	EYSC-160	24
990MA	15	C-100CA	7,12	CS-200B	2	EYPF-4	24
991MA	15	C-125CA	7,12	CS-250B	2	EYPF-8	24
992MA	15	C-150CA	7,12	CS-300B	2	EYPF-16	24
993MA	15	C-200CA	7,12	CS-350B	2	FC-14	22
994MA	15	C-50M	13	CS-400B	2	FC-16	22
995MA	15	C-75M	13	CS-150PT1	2	FC-18	22
996MA	15	C-100M	13	CS-200PT1	2	FC-110	22
997MA	15	C-125M	13	CS-250PT1	2	FC-112	22
998MA	15	C-150M	13	CS-300PT1	2	FC-115	22
999MA	15	C-200M	13	CS-350PT1	2	FC-118	22
1010C	20	C-250M	13	CS-400PT1	2	FC-121	22
1011C	20	C-300M	13	CS-150PT2	2	FC-124	22
1012C	20	C-350M	13	CS-200PT2	2	FC-127	22
1013C	20	C-400M	13	CS-250PT2	2	FC-130	22
1014C	20	CBS	45	CS-300PT2	2	FC-133	22
1015C	20	CC-50A	11	CS-350PT2	2	FC-136	22
1016C	20	CC-75A	11	CS-400PT2	2	FC-24	22
1017C	20	CC-100A	11	CSR-200B	2	FC-26	22

Part No.	Page Number	Part No.	Page Number	Part No.	Page Number	Part No.	Page Number
FC-28	22	GL-125	19	LB-350AE	6	LL-75M	13
FC-210	22	GL-150	19	LB-400AE	6	LL-100M	13
FC-212	22	GL-200	19	LB-50CA	7,12	LL-125M	13
FC-215	22	GL-250	19	LB-75CA	7,12	LL-150M	13
FC-218	22	GL-300	19	LB-100CA	7,12	LL-200M	13
FC-221	22	GL-350	19	LB-125CA	7,12	LL-250M	13
FC-224	22	GL-400	19	LB-150CA	7,12	LL-300M	13
FC-227	22	GL-500	19	LB-200CA	7,12	LL-350M	13
FC-230	22	GL-144	48	LB-50M	13	LL-400M	13
FC-233	22	GL-1410	48	LB-75M	13	LLC-50A	12
FC-236	22	GL-630	48	LB-100M	13	LLC-75A	12
FC-36	22	GL-6250	48	LB-125M	13	LLC-100A	12
FC-38	22	GP	48	LB-150M	13	LLC-125A	12
FC-310	22	GUAB-50A	23	LB-200M	13	LLC-150A	12
FC-312	22	GUAB-75A	23	LB-250M	13	LLC-200A	12
FC-315	22	GUAB-100A	23	LB-300M	13	LLC-250A	12
FC-318	22	GUAC-50A	23	LB-350M	13	LLC-300A	12
FC-321	22	GUAC-75A	23	LB-400M	13	LLC-350A	12
FC-324	22	GUAC-100A	23	LBC-50A	12	LLC-400A	12
FC-327	22	GUAL-50A	23	LBC-75A	12	LR-50A	11
FC-330	22	GUAL-75A	23	LBC-100A	12	LR-75A	11
FC-333	22	GUAL-100A	23	LBC-125A	12	LR-100A	11
FC-336	22	GUAT-50A	23	LBC-150A	12	LR-125A	11
FC-412	22	GUAT-75A	23	LBC-200A	12	LR-150A	11
FC-415	22	GUAT-100A	23	LBC-250A	12	LR-200A	11
FC-418	22	GWS-8	30	LBC-300A	12	LR-250A	11
FC-421	22	H50WB	45	LBC-350A	12	LR-300A	11
FC-424	22	H75WB	45	LBC-400A	12	LR-350A	11
FC-427	22	H100WB	45	LL-50A	11	LR-400A	11
FC-430	22	H125AWB	45	LL-75A	11	LR-50AE	6
FC-433	22	H125WB	45	LL-100A	11	LR-75AE	6
FC-436	22	H150WB	45	LL-125A	11	LR-100AE	6
FC-512	22	H200WB	45	LL-150A	11	LR-125AE	6
FC-515	22	H250WB	45	LL-200A	11	LR-150AE	6
FC-518	22	H300WB	45	LL-250A	11	LR-200AE	6
FC-521	22	H350WB	45	LL-300A	11	LR-250AE	6
FC-524	22	H400WB	45	LL-350A	11	LR-300AE	6
FC-527	22	LB-50A	11	LL-400A	11	LR-350AE	6
FC-530	22	LB-75A	11	LL-50AE	6	LR-400AE	6
FC-533	22	LB-100A	11	LL-75AE	6	LR-50CA	7,13
FC-536	22	LB-125A	11	LL-100AE	6	LR-75CA	7,13
FC-612	22	LB-150A	11	LL-125AE	6	LR-100CA	7,13
FC-615	22	LB-200A	11	LL-150AE	6	LR-125CA	7,13
FC-618	22	LB-250A	11	LL-200AE	6	LR-150CA	7,13
FC-621	22	LB-300A	11	LL-250AE	6	LR-200CA	7,13
FC-624	22	LB-350A	11	LL-300AE	6	LR-50M	13
FC-627	22	LB-400A	11	LL-350AE	6	LR-75M	13
FC-630	22	LB-50AE	6	LL-400AE	6	LR-100M	13
FC-633	22	LB-75AE	6	LL-50CA	7,13	LR-125M	13
FC-636	22	LB-100AE	6	LL-75CA	7,13	LR-150M	13
FG-1DC	41	LB-125AE	6	LL-100CA	7,13	LR-200M	13
FG-1DCW	41	LB-150AE	6	LL-125CA	7,13	LR-250M	13
GL-50	19	LB-200AE	6	LL-150CA	7,13	LR-300M	13
GL-75	19	LB-250AE	6	LL-200CA	7,13	LR-350M	13
GL-100	19	LB-300AE	6	LL-50M	13	LR-400M	13

Part No.	Page Number	Part No.	Page Number	Part No.	Page Number	Part No.	Page Number
LRC-50A	12	NMLT-90-50	27	P11500	17	PC-2	41
LRC-75A	12	NMLT-90-75	27	P11520	17	PC-2W	41
LRC-100A	12	NMLT-90-100	27	P11530	17	PC-3	41
LRC-125A	12	NMLT-90-125	27	P11540	17	PC-3W	41
LRC-150A	12	NMLT-90-150	27	P11550	17	PC-71	41
LRC-200A	12	NMLT-90-200	27	P11560	17	PC-71W	41
LRC-250A	12	P105	16	P11580	17	PC-81	41
LRC-300A	12	P107	16	P11510	17	PC-81W	41
LRC-350A	12	P110	16	P11512	17	PC-261	41
LRC-400A	12	P112	16	P12000	17	PC-261W	41
MC-50	30	P115	16	P12025	17	PC-271	41
MC-50D	30	P120	16	P12030	17	PC-271W	41
MIB-90M	18	P125	16	P12040	17	PL-11	40
MIB-91M	18	P130	16	P12050	17	PL-11W	40
MIB-92M	18	P140	16	P12060	17	PL-11-2	40
MIB-93M	18	P10500	16	P12080	17	PL-11-2W	40
MIB-94M	18	P10515	16	P12010	17	PL-11-22	40
MIB-95M	18	P10520	16	P12012	17	PL-11-22W	40
MIB-96M	18	P10525	16	P12500	17	PL-14	40
MIB-97M	18	P10530	16	P12530	17	PL-14W	40
MIB-98M	18	P10540	16	P12540	17	PL-14-2	40
MIB-99M	18	P10550	16	P12550	17	PL-14-2W	40
MIB-101M	18	P10560	16	P12560	17	PL-14-22	40
MIB-102M	18	P10580	16	P12580	17	PL-14-22W	40
MIGB-80M	17	P10510	16	P12510	17	PL-15	40
MIGB-81M	17	P10512	16	P12512	17	PL-15-22	40
MIGB-82M	17	P10700	16	P13000	17	PLBY-50	23
MIGB-83M	17	P10715	16	P13030	17	PLBY-75	23
MIGB-84M	17	P10720	16	P13040	17	PLBY-100	23
MIGB-85M	17	P10725	16	P13050	17	PLBY-125	23
MIGB-86M	17	P10730	16	P13060	17	PO-50	41
MIGB-87M	17	P10740	16	P13080	17	PR-1	41
MIGB-88M	17	P10750	16	P13010	17	PR-1W	41
MIGB-89M	17	P10760	16	P13012	17	PR-2	41
MIGB-101M	17	P10780	16	P14000	17	PR-2W	41
MIGB-102M	17	P10710	16	P14040	17	PR-3	41
MK-200	43	P10712	16	P14050	17	PR-3W	41
MK-250	43	P11000	17	P14060	17	PR11-4	40
NMLC-50	27	P11020	17	P14080	17	PR11-4W	40
NMLC-50R	27	P11030	17	P14010	17	PR14-4	40
NMLC-75	27	P11040	17	P14012	17	PR14-4W	40
NMLC-75R	27	P11050	17	P-1	40	PT-11	40
NMLC-100	27	P11060	17	P-1W	40	PT-11W	40
NMLC-100R	27	P11080	17	P-2	40	PT-11-22	40
NMLC-125	27	P11010	17	P-2W	40	PT-11-22W	40
NMLC-150	27	P11012	17	P-3	40	PT-14	40
NMLC-200	27	P11200	17	P-3W	40	PT-14W	40
NMLT-38	27	P11220	17	PAR-1	40	PT-14-22	40
NMLT-50	27	P11230	17	PAR-1W	40	PT-14-22W	40
NMLT-75	27	P11240	17	PC-0	40	PT-15	40
NMLT-100	27	P11250	17	PC-0W	40	PT-15-22	40
NMLT-125	27	P11260	17	PC-02	40	RA-6A	48
NMLT-150	27	P11280	17	PC-02W	40	RA-2A	48
NMLT-200	27	P11210	17	PC-1	41	RA-0	48
NMLT-90-38	27	P11212	17	PC-1W	41	RA-2/0	48

Part No.	Page Number
RB50-38	18
RB75-50	18
RB100-50	18
RB100-75	18
RB125-50	18
RB125-75	18
RB125-100	18
RB150-50	18
RB150-75	18
RB150-100	18
RB150-125	18
RB200-50	18
RB200-75	18
RB200-100	18
RB200-125	18
RB200-150	18
RB250-100	18
RB250-125	18
RB250-150	18
RB250-200	18
RB300-100	18
RB300-125	18
RB300-150	18
RB300-200	18
RB300-250	18
RB350-200	18
RB350-250	18
RB350-300	18
RB400-200	18
RB400-250	18
RB400-300	18
RB400-350	18
RF2	43
RF25	43
RLB-4550	16
RLB-4575	16
RLB-45100	16
RLB-45125	16
RLB-45150	16
RLB-45200	16
RLB-45250	16
RLB-45300	16
RLB-45400	16
RLB-9050	16
RLB-9075	16
RLB-90100	16
RLB-90125	16
RLB-90150	16
RLB-90200	16
RLB-90250	16
RLB-90300	16
RLB-90400	16
RT-260	6,27
RT-261	6,27
RT-38	26

Part No.	Page Number
RT-50	26
RT-75	26
RT-100	26
RT-125	26
RT-150	26
RT-200	26
RT-250	26
RT-300	26
RT-350	26
RT-400	26
RT-90-38	26
RT-90-50	26
RT-90-75	26
RT-90-100	26
RT-90-125	26
RT-90-150	26
RT-90-200	26
RT-90-250	26
RT-90-300	26
RT-90-350	26
RT-90-400	26
RT-38S	26
RT-50S	26
RT-75S	26
RT-100S	26
RT-125S	26
RT-150S	26
RT-200S	26
RT-38MA	26
RT-50MA	26
RT-75MA	26
RT-100MA	26
RT-125MA	26
RT-150MA	26
RT-200MA	26
RT-250MA	26
RT-300MA	26
RT-350MA	26
RT-400MA	26
RT-45-38MA	26
RT-45-50MA	26
RT-45-75MA	26
RT-45-100MA	26
RT-45-125MA	26
RT-45-150MA	26
RT-45-200MA	26
RT-45-250MA	26
RT-45-300MA	26
RT-45-350MA	26
RT-45-400MA	26
RT-90-38MA	26
RT-90-50MA	26
RT-90-75MA	26
RT-90-100MA	26
RT-90-125MA	26

Part No.	Page Number
RT-90-150MA	26
RT-90-200MA	26
RT-90-250MA	26
RT-90-300MA	26
RT-90-350MA	26
RT-90-400MA	26
RTCC-50	16,27
RTCC-75	16,27
RW75-50	19
RW100-50	19
RW100-75	19
RW125-50	19
RW125-75	19
RW125-100	19
RW150-50	19
RW150-75	19
RW150-100	19
RW150-125	19
RW200-50	19
RW200-75	19
RW200-100	19
RW200-125	19
RW200-150	19
RW250-50	19
RW250-75	19
RW250-100	19
RW250-125	19
RW250-150	19
RW250-200	19
RW300-50	19
RW300-75	19
RW300-100	19
RW300-125	19
RW300-150	19
RW300-200	19
RW300-250	19
RW350-50	19
RW350-75	19
RW350-100	19
RW350-125	19
RW350-150	19
RW350-200	19
RW350-250	19
RW350-300	19
RW400-50	19
RW400-75	19
RW400-100	19
RW400-125	19
RW400-150	19
RW400-200	19
RW400-250	19
RW400-300	19
RW400-350	19
SB-10	48
SB-8	48

Part No.	Page Number
SB-6	48
SB-4	48
SB-2	48
SB-1/0	48
SB-2/0	48
SB-3/0	48
SB-4/0-250	48
SB-350	48
SB-500	48
SB-10-SP	48
SB-8-SP	48
SB-6-SP	48
SB-4-SP	48
SB-2-SP	48
SB-1/0-SP	48
SB-2/0-SP	48
SB-3/0-SP	48
SB-4/0-250-SP	48
SB-350-SP	48
SB-500-SP	48
SC-50	8,14
SC-75	8,14
SC-100	8,14
SC-125	8,14
SC-200	8,14
SC-250	8,14
SC-350	8,14
SI-100	45
T-50A	11
T-75A	11
T-100A	11
T-125A	11
T-150A	11
T-200A	11
T-250A	11
T-300A	11
T-350A	11
T-400A	11
T-50AE	7
T-75AE	7
T-100AE	7
T-125AE	7
T-150AE	7
T-200AE	7
T-250AE	7
T-300AE	7
T-350AE	7
T-400AE	7
T-50CA	7,13
T-75CA	7,13
T-100CA	7,13
T-125CA	7,13
T-150CA	7,13
T-200CA	7,13
T-50M	13

Part No.	Page Number	Part No.	Page Number	Part No.	Page Number	Part No.	Page Number
T-75M	13	V45-S-300	35	VEB-75	37	VFSCC-75	37
T-100M	13	V45-S-350	35	VEB-100	37	VFSCC-100	37
T-125M	13	V45-S-400	35	VEB-125	37	VFSS-50	37
T-150M	13	V45-S-500	35	VEB-150	37	VFSS-75	37
T-200M	13	V45-S-600	35	VEB-200	37	VFSS-100	37
T-250M	13	V90-S-50	35	VEB-250	37	VG-50	8,14
T-300M	13	V90-S-75	35	VEB-300	37	VG-75	8,14
T-350M	13	V90-S-100	35	VEB-350	37	VG-100	8,14
T-400M	13	V90-S-125	35	VEB-400	37	VG-125	8,14
TC-50A	12	V90-S-150	35	VEB-500	37	VG-200	8,14
TC-75A	12	V90-S-200	35	VEB-600	37	VG-250	8,14
TC-100A	12	V90-S-250	35	VEC-50	37	VG-350	8,14
TC-125A	12	V90-S-300	35	VEC-75	37	VJB-442	38
TC-150A	12	V90-S-350	35	VEC-100	37	VJB-444	38
TC-200A	12	V90-S-400	35	VEC-125	37	VJB-664	38
TC-250A	12	V90-S-500	35	VEC-150	37	VJB-666	38
TC-300A	12	V90-S-600	35	VEC-200	37	VJB-884	38
TC-350A	12	VBA-50	36	VEC-250	37	VJB-886	38
TC-400A	12	VBA-75	36	VEC-300	37	VJB-887	38
TAC-50	30	VBA-100	36	VEC-350	37	VJB-12124	38
TAC-75	30	VBA-125	36	VEC-400	37	VJB-12126	38
TAC-100	30	VBA-150	36	VEJ-50	35	VLB-50	35
TAC-125	30	VBA-200	36	VEJ-75	35	VLB-75	35
TH-161S	18	VBA-250	36	VEJ-100	35	VLB-100	35
TH-162S	18	VBA-300	36	VEJ-125	35	VLB-125	35
TH-163S	18	VBA-350	36	VEJ-150	35	VLB-150	35
TH-164S	18	VBA-400	36	VEJ-200	35	VLB-200	35
TH-165S	18	VBC	38	VEJ-250	35	VLB-250	35
TH-166S	18	VC-50	35	VEJ-300	35	VLB-300	35
TH-167S	18	VC-75	35	VEJ-350	35	VLB-350	35
TH-168S	9,18	VC-100	35	VEJ-400	35	VLB-400	35
TH-169S	9,18	VC-125	35	VEJ-500	35	VLL-50	36
TH-170S	9,18	VC-150	35	VEJ-600	35	VLL-75	36
TH-171S	9,18	VC-200	35	VFA-50	36	VLL-100	36
TH-173S	18	VC-250	35	VFA-75	36	VLL-125	36
TH-174S	18	VC-300	35	VFA-100	36	VLL-150	36
TH-180S	9	VC-350	35	VFA-125	36	VLL-200	36
TH-181S	9	VC-400	35	VFA-150	36	VLL-250	36
TH-182S	9	VCEM-1/2PT	38	VFA-200	36	VLL-300	36
TH-183S	9	VCEM-PT	38	VFA-250	36	VLL-350	36
TH-184S	9	VCEM-QT	38	VFA-300	36	VLL-400	36
TH-185S	9	VPRIM-PT	38	VFA-350	36	VLR-50	36
TPO-50V	41	VCPL-50	37	VFA-400	36	VLR-75	36
UF-50	43	VCPL-75	37	VFA-500	36	VLR-100	36
UF-75	43	VCPL-100	37	VFA-600	36	VLR-125	36
UNF-50	23	VCPL-125	37	VFB	38	VLR-150	36
UNF-75	23	VCPL-150	37	VFBDRC	38	VLR-200	36
UNF-100	23	VCPL-200	37	VFD	38	VLR-250	36
V45-S-50	35	VCPL-250	37	VFS-50	37	VLR-300	36
V45-S-75	35	VCPL-300	37	VFS-75	37	VLR-350	36
V45-S-100	35	VCPL-350	37	VFS-100	37	VLR-400	36
V45-S-125	35	VCPL-400	37	VFSC-50	37	VMH-125	35
V45-S-150	35	VCPL-500	37	VFSC-75	37	VMH-150	35
V45-S-200	35	VCPL-600	37	VFSC-100	37	VMH-200	35
V45-S-250	35	VEB-50	37	VFSCC-50	37	VMH-250	35

Part No.	Page Number
VMH-300	35
VMH-350	35
VMH-400	35
VMR-61	37
VMR-63	37
VMR-66	37
VMR-70	37
VMR-75	37
VMR-81	37
VMR-88	37
VMR-404	37
VMR-405	37
VT-50	36
VT-75	36
VT-100	36
VT-125	36
VT-150	36
VT-200	36
VT-250	36
VT-300	36
VT-350	36
VT-400	36
VTA-50	36
VTA-75	36
VTA-100	36
VTA-125	36
VTA-150	36
VTA-200	36
VTA-250	36
VTA-300	36
VTA-350	36
VTA-400	36
VTA-500	36
VTA-600	36
VTH-50	38
VTH-75	38
VTH-100	38
VTH-125	38
VTH-150	38
VTH-200	38
VTH-250	38
VTH-300	38
VTH-400	38
WH-1	15
WH-2	15
WH-3	15
WH-4	15
WH-5	15
WH-6	15
WH-7	15
WH-8	15
WH-9	15
WH-10	15
WH-1M	15
WH-2M	15

Part No.	Page Number
WH-3M	15
WH-4M	15
WH-5M	15
WH-6M	15
WH-7M	15
WH-8M	15
WH-9M	15
WH-10M	15
XLB-50	23
XLB-75	23
XT-50	23
XT-75	23

Notes

Remembering Arthur LeMay (1926 – 2018) A Pioneer in the Electrical Fittings Industry



As a member of PECO's founding family and PECO's leader beginning immediately after WWII, Arthur LeMay has given more to our current success than any single individual over the past 80+ years. Even in the years since his passing, his passion for product quality and service, generosity with people, and both personal and professional dedication to everyone around him - from the manufacturing team to his community and family - continue to help define our vibrant and collaborative work culture at PECO.

"Art" began his work at "The Shop" (the family's informal name for the business), located at 932 Rogers Place in the Bronx, as the Shipping Clerk with his mother and father, Louis and Minerva Levine, running the business.

When WWII arrived, he enlisted in the U.S. Army's Specialized Training Reserve Program. He was sent to NYU School of Engineering before serving on active duty from 1944 to 1946 as a Browning Automatic Rifleman (BAR) in key regional theaters, including the Philippines. Arthur distinguished himself in Advanced Infantry Training and was awarded the Expert Infantryman's Badge.




After his return to the United States, Art led PECO through the celebrations and crises of this American, family-owned business from 1946 to 2018. Customers today still remember him as "firmly at the helm" until the very last years of his life. He built strong personal relationships with our suppliers, agents and customers over the years and those same relationships carry over to his family today.



1991 NYC Marathon

Art served as a model to everyone around him by challenging himself throughout his lifetime. He completed a lifelong goal by returning to college and graduating with a Bachelor of Science from Columbia University at the age of 67. As an avid runner, he also completed 24 New York City Marathons up until he turned 77 years old.

Every time the PECO team completes a successful quality-control review, delivers to a customer faster than they expected due to our manufacturing process or large inventory, or contributes to another landmark high-rise building across our nation, many of us here remember "Mr. LeMay." We know that we are advancing his legacy and transforming the best of his life's work into products, projects and services vital to America's economy, culture and communities in the 21st century. 



CONTACT OUR FRIENDLY CUSTOMER SERVICE
845-359-4900 • CUSTOMERSERVICE@PECO-ELECTRIC.COM

WWW.PECO-ELECTRIC.COM

Producto Electric Corporation
11 Kings Highway
Orangeburg, NY 10962

 [/company/producto-electric](https://www.linkedin.com/company/producto-electric)

