


P1211 thru P1217

Universal Clamps for Rigid or Thinwall Conduit

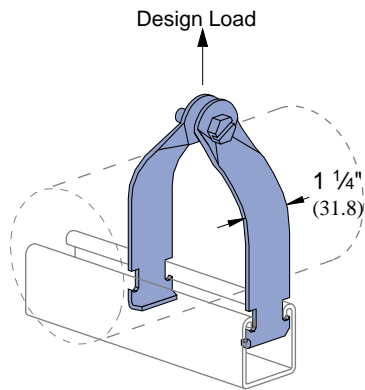


Slotted hex head screw and nut included.
Finish: Electro-galvanized.

Part Number	Pipe/Conduit Size In	Thickness Gauge (mm)	Wt/100 pcs Lbs (kg)	Design Load Lbs (kg)
P1211	1/2	16 1.5	10 4.5	400 181
P1212	3/4	16 1.5	11 5.0	400 181
P1213	1	16 1.5	12 5.4	400 181
P1214	1 1/4	14 1.9	18 8.2	600 272
P1215	1 1/2	14 1.9	20 9.1	600 272
P1217	2	14 1.9	22 10.0	600 272

P1563 thru P1573

Parallel Clamps for Rigid Conduit and Pipe

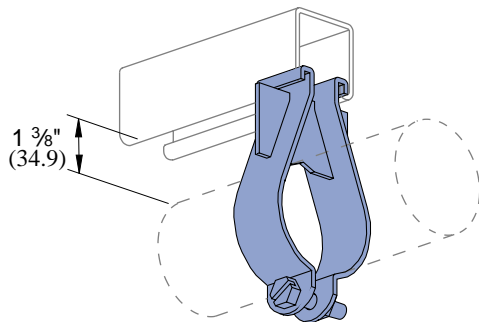


Slotted hex head screw and nut included.
Finish: Electro-galvanized.

Part Number	Pipe Size In	O.D. Size In (mm)	Thickness Gauge (mm)	Wt/100 pcs Lbs (kg)
P1563	3/8	0.675 17.1	14 1.9	27 12.2
P1564	1/2	0.840 21.3	14 1.9	29 13.2
P1565	3/4	1.050 26.7	14 1.9	30 13.6
P1566	1	1.315 33.4	14 1.9	31 14.1
P1567	1 1/4	1.660 42.2	14 1.9	38 17.2
P1568	1 1/2	1.900 48.3	12 2.7	40 18.1
P1569	2	2.375 60.3	12 2.7	47 21.3
P1570	2 1/2	2.875 73.0	12 2.7	66 29.9
P1571	3	3.500 88.9	12 2.7	78 35.4
P1572	3 1/2	4.000 101.6	12 2.7	87 39.5
P1573	4	4.500 114.3	12 2.7	90 40.8

P2008 thru P2020

One Hole Clamp for O.D. Tubing

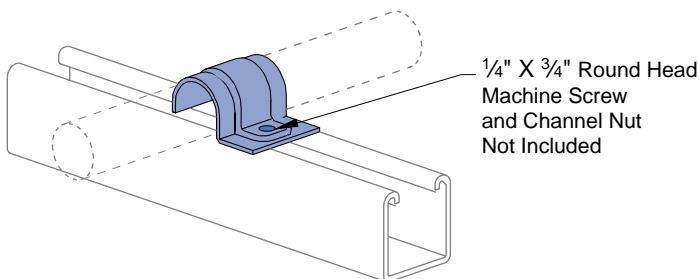


Finish: Electro-galvanized and Aluminum

Part Number	O.D. Tube Size In (mm)	Thickness Gauge (mm)	Wt/100 pcs Lbs (kg)
P2008	1/4 6.4	16 1.5	4 1.8
P2009	5/16 7.9	16 1.5	5 2.3
P2010	3/8 9.5	16 1.5	5 2.3
P2012	1/2 12.7	16 1.5	6 2.7
P2014	5/8 15.9	14 1.9	8 3.6
P2016	3/4 19.1	14 1.9	9 4.1
P2018	7/8 22.2	14 1.9	10 4.5
P2020	1 25.4	14 1.9	11 5.0



UNISTRUT®

PIPE/CONDUIT SUPPORTS

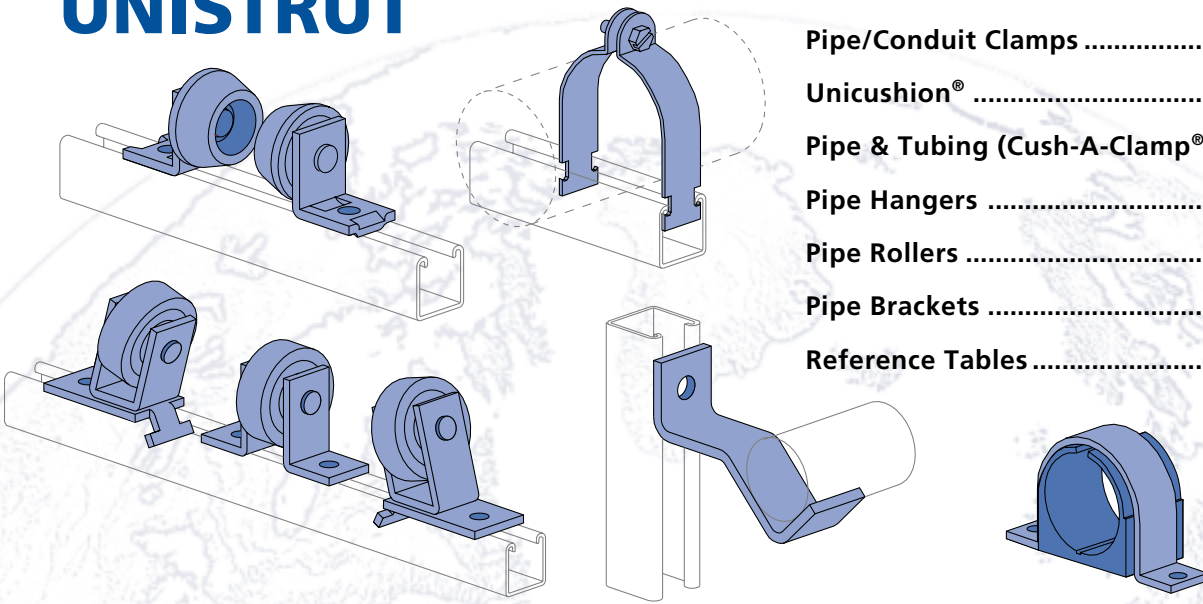

Pipe/Conduit Clamps	139
Unicushion®	144
Pipe & Tubing (Cush-A-Clamp®) Clamps	146
Pipe Hangers	149
Pipe Rollers	150
Pipe Brackets	153
Reference Tables	154

MATERIAL

Unistrut pipe clamps, unless noted, are punch-press made from hot-rolled, pickled and oiled steel plates, strip or coil, and conform to ASTM specifications A1008, A575, A576, A635, or A36. The fitting steel also meets the physical requirements of ASTM A1011 SS GR 33. The pickling of the steel produces a smooth surface free from scale.

Many items are also available in stainless steel. Consult factory for ordering information.

FINISHES

Pipe supports are available in:

- Electro-galvanized (EG), conforming to ASTM B633 Type III SC1
- Hot-dipped galvanized (HG), conforming to ASTM A123 or A153 (hardware)
- Perma-Green II (GR), and plain (PL).

APPLICATION

Unistrut pipe clamps, pipe hangers, brackets and rollers are designed for the support of electrical and mechanical services. Supports to meet nearly every requirement can be attained using Unistrut Metal Framing components.

DIMENSIONS

Imperial dimensions are illustrated in inches. Metric dimensions are shown in parenthesis or as noted. Unless noted, all metric dimensions are in millimeters and rounded to one decimal place.

DESIGN BOLT TORQUE

BOLT SIZE	1/4"	5/16"	3/8"	1/2"	5/8"	3/4"
FOOT LBS.	6	11	19	50	100	125
N·m	8	15	25	70	135	170

Note: When tightening 1/4" screws used with a two piece pipe clamp, a torque of 5 foot pounds (60 inch-pounds) should be used.

DESIGN LOAD

Design load data, where shown, is based on the ultimate strength of the connection with a safety factor of 5.0, unless otherwise noted.

Pipe Clamps In Special Materials (P1109, P1211, P1425, P2024 Series)

Material	Add Suffix to P/N	Example
Steel Strap, Everdur Hardware	E	P1109 E
Copper Coated Steel Strap & Hardware	CC	P1109 CC
Aluminum	AL	P1109 AL
Stainless Steel 304 or 316	SS or ST	P1109 SS
Plastic Coated Steel Straps	PC	P1109 PC